



# Solenoid valve 2/2 way N.C. Direct acting

21A1KV15  
÷  
21A1KV30

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** subplate mounting


**COILS** 8W - Ø 13 (1)  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)  
(1) Explosion-proof housing for coils with electrical connections EN 175301-803 on request.

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coils class F -10°C + 60°C  
with coils class H -10°C + 80°C



| Gaskets                     | Temperature |        | Medium                                                |
|-----------------------------|-------------|--------|-------------------------------------------------------|
| V=FKM (fluoroelastomer)     | - 10°C      | +140°C | Mineral oils (2°E), gasoline gas oil, fuel oils (7°E) |
| B=NBR (nitrile rubber)      | - 10°C      | + 90°C | Air, inert gas, water                                 |
| E=EPDM (ethylene-propylene) | - 10°C      | +140°C | Water, steam                                          |

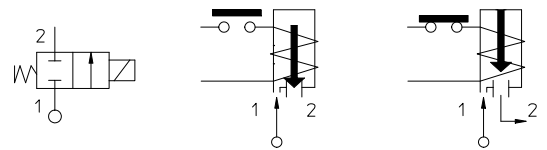

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A1KB15.

| Pipe              | Code     | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |    |
|-------------------|----------|---------------|-----|---------|------------|-----------------|------------|---------------------------|----|
|                   |          | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |    |
| SUBPLATE MOUNTING | 21A1KV15 | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 30                        | 18 |
|                   | 21A1KV20 | 37            | ~ 5 | 2       | 2          |                 |            | 22                        | 16 |
|                   |          |               |     |         |            | 35              |            | 30                        |    |
|                   | 21A1KV25 | 53            | ~ 7 | 2,5     | 3,2        | 8               |            | 14                        | 9  |
|                   |          |               |     |         |            | 12              |            | 30                        | 25 |
|                   |          |               |     |         |            | 14              |            | 10                        | 6  |
|                   | 21A1KV30 | 53            | ~ 7 | 3       | 4          | 8               | 25         | 18                        |    |
|                   |          |               |     |         |            | 12              |            | 20                        |    |
|                   |          |               |     |         |            | 14              |            |                           |    |

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

## MATERIALS:

|                                |                                             |
|--------------------------------|---------------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N                 |
| <b>Armature tube</b>           | Stainless steel AISI series 300             |
| <b>Fixed core</b>              | Stainless steel AISI series 400             |
| <b>Plunger</b>                 | Stainless steel AISI series 400             |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                           |
| <b>Spring</b>                  | Stainless steel AISI series 300             |
| <b>Seal</b>                    | Standard: V=FKM<br>On request: B=NBR E=EPDM |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300             |

## On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

## FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

## SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R450886/V
- Complete armature tube:**  
Code R450606
- Gasket O-Ring:**  
Code R990002/V

## KIT:

KT130KV30-A=2+3

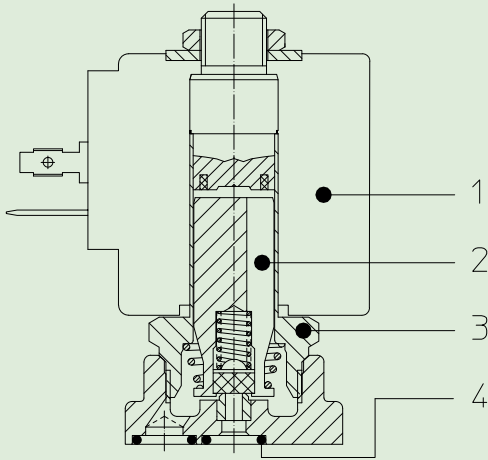

## DIMENSIONS:

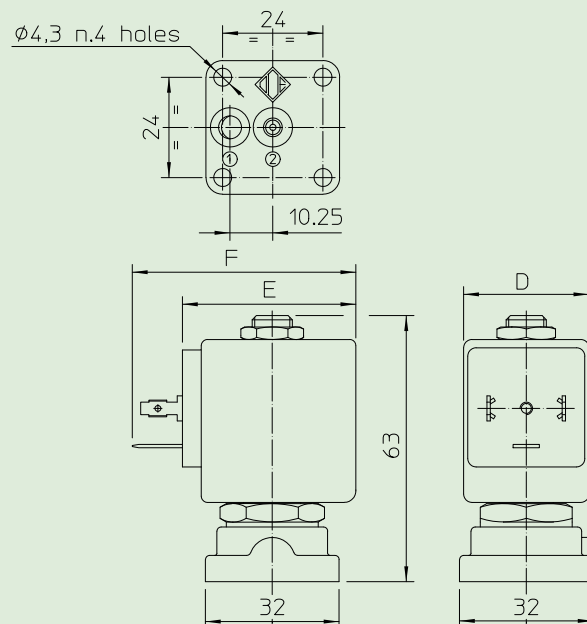

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>=           | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U         | 12               | 23           | 35             | 36         | 48      | 60      |
| G         | 14               | 27           | 43             | 52         | 55      | 67      |



# Solenoid valve 2/2 way N.C. Direct acting

21A1KR10  
÷  
21A1KR30

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction material.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Hot water, Heating  
Steam (180°C)

**PIPES:** subplate mounting


**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coil class F - 40°C + 60°C  
with coil class H - 40°C + 80°C



| Gaskets | Temperature    | Medium                                                        |
|---------|----------------|---------------------------------------------------------------|
| R=RUBY  | - 40°C + 180°C | Steam, water, mineral oils (2°E),<br>gas oil, fuel oils (7°E) |

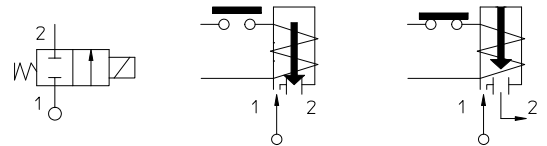

| Pipe                 | Code     | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |    |
|----------------------|----------|---------------|-----|---------|------------|-----------------|------------|---------------------------|----|
|                      |          | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |    |
| SUBPLATE<br>MOUNTING | 21A1KR10 | 12            | ~ 2 | 1       | 0,45       | 8               | 0          | 40                        | 23 |
|                      | 21A1KR15 |               |     | 1,5     | 1,4        |                 |            | 30                        | 15 |
|                      | 21A1KR20 | 37            | ~ 5 | 2       | 2          |                 |            | 25                        | 9  |
|                      | 21A1KR25 | 53            | ~ 7 | 2,5     | 3,2        |                 |            | 14                        | 5  |
|                      | 21A1KR30 |               |     | 3       | 4          |                 |            | 10                        | 4  |

## Note

The use of rigid sealings usually implies a slight leakage, limited within 2scc/min at the pressure of 1 bar..

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

## MATERIALS:

|                                |                             |
|--------------------------------|-----------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N |
| <b>Armature tube</b>           | Stainless steel series 300  |
| <b>Fixed core</b>              | Stainless steel series 400  |
| <b>Plunger</b>                 | Stainless steel series 300  |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%           |
| <b>Spring</b>                  | Stainless steel series 300  |
| <b>Seal</b>                    | R=RUBY                      |
| <b>Orifice: Inserted slot</b>  | Stainless steel series 300  |

## On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

## FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

## SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R450820/R
- Complete armature tube:**  
Code R450606
- Gasket O-Ring:**  
Code R990002/S

## KIT:

KT130KR30-A=2+3

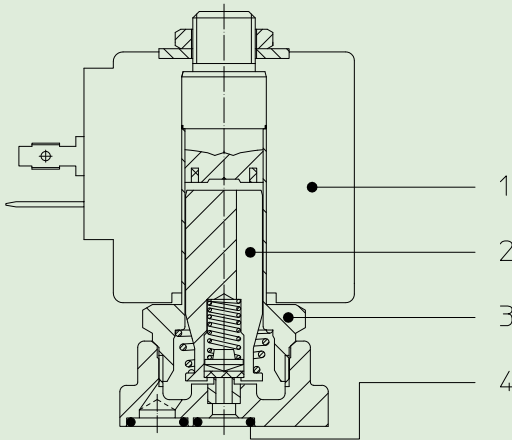

## DIMENSIONS:

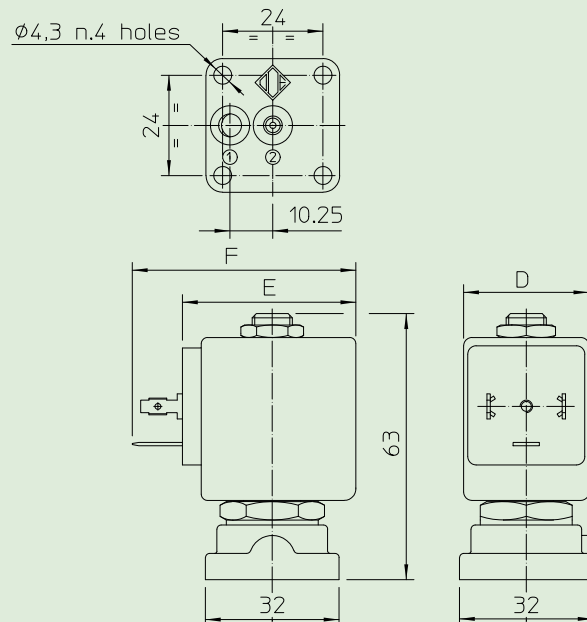

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |



# Solenoid valve 2/2 way N.O. Direct acting - dampness-proof IP 67

21A1ZR15D-GB

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** subplate mounting


**COIL:** 8W - Ø 13  
BDS 155°C (class F)  
BDF - BDV 180°C (class H)

## INCAPSULAMENTO E ROCCHETTO SONO REALIZZATI CON MATERIALE VERGINE AL 100%.

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coil class F - 40°C + 60°C  
with coil class H - 40°C + 80°C



| Gaskets | Temperature    | Medium                                                 |
|---------|----------------|--------------------------------------------------------|
| R=RUBY  | - 40°C + 180°C | Water, mineral oils (2°E),<br>gas oil, fuel oils (7°E) |

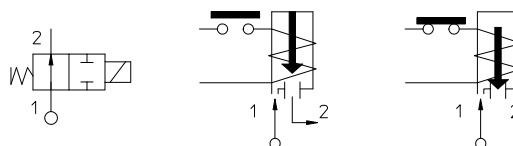

| Pipe                 | Code         | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |
|----------------------|--------------|---------------|-----|---------|------------|-----------------|------------|----------|--------|
|                      |              | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D. |        |
|                      |              |               |     |         |            |                 |            | AC bar   | DC bar |
| SUBPLATE<br>MOUNTING | 21A1ZR15D-GB | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 35       | 35     |

## Note

Also available with brass body without lead.  
Available on request and with minimum quantities.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | R=RUBY                          |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300 |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                                       |
|------------------------------|-----------------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                               |
| <b>Protection degree</b>     | IP 67 EN 60529 (DIN 40050)<br>with coil fitted by connector dedicated |

### SPARE PARTS:


|                                                                  |                                            |
|------------------------------------------------------------------|--------------------------------------------|
| <b>1. Coil:</b><br>See coils list                                | <b>6. Gasket O-Ring:</b><br>Code R990002/S |
| <b>2. Complete diaphragm support:</b><br>Code R450789/V          | <b>7. Gasket O-Ring:</b><br>Code R990001/S |
| <b>3. Gasket O-Ring:</b><br>Code R990015/S                       |                                            |
| <b>4. Complete armature tube without gasket:</b><br>Code R450573 |                                            |
| <b>5. Gasket O-Ring:</b><br>Code R990000/V                       |                                            |

### KIT:

KT130ZR30-FG=2+3+4+5+6+8+9

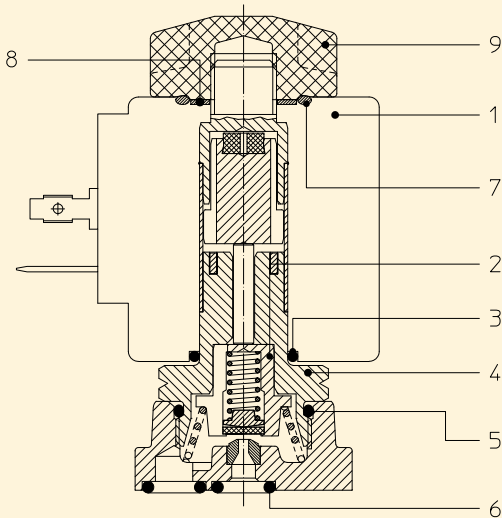

### DIMENSIONS:

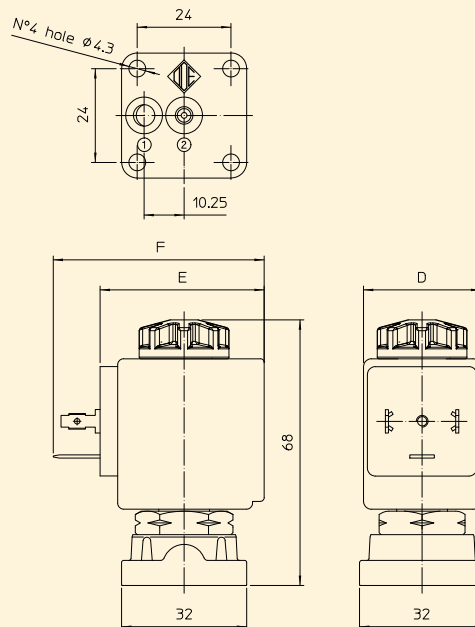

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |



# Solenoid valve 2/2 way N.O. Direct acting

21AN2ZR20D-TF

### PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Hot water, Heating  
Steam (180°C)

**PIPES:** 1/4 NPT

**COIL:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
Environment temperature:  
with coil class **F** - 40°C + 60°C  
with coil class **H** - 40°C + 80°C



Special item-not standard

| Gaskets | Temperature    | Medium                                                        |
|---------|----------------|---------------------------------------------------------------|
| R=RUBY  | - 40°C + 180°C | Steam, water, mineral oils (2°E),<br>gas oil, fuel oils (7°E) |




| Pipe<br>ANSI/ASME<br>BI.20.1 | Code          | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |    |
|------------------------------|---------------|---------------|-----|---------|------------|-----------------|------------|---------------------------|----|
|                              |               | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |    |
| 1/4 NPT                      | 21AN2ZR20D-TF | 37            | ~ 5 | 2       | 2          | 8               | 0          | 30                        | 30 |

### Note

Available on request and with minimum quantities.

The use of rigid sealings usually implies a slight leakage, limited within 2 scc/min at the pressure of 1 bar.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

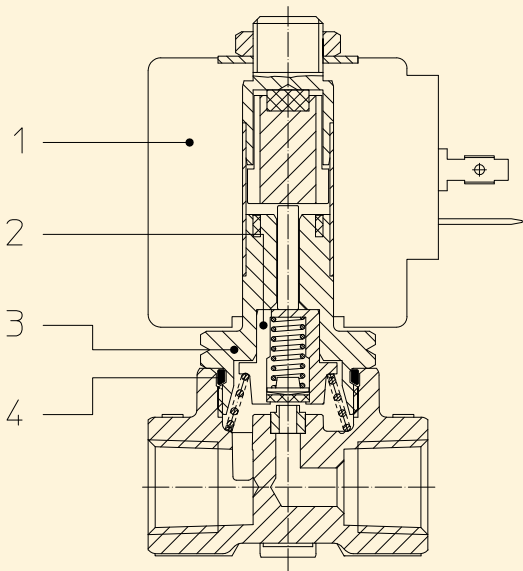

#### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | R=RUBY                          |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300 |

#### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

#### FEATURES:

|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |


#### SPARE PARTS:

- Coil:**  
BDV08224BU
- Complete diaphragm support:**  
Code R450789
- Complete armature tube without gasket:**  
Code R450573
- Gasket O-Ring:**  
Code R990000/F

#### KIT:

KT130ZR30-FF=**2+3+4**

#### DIMENSIONS:

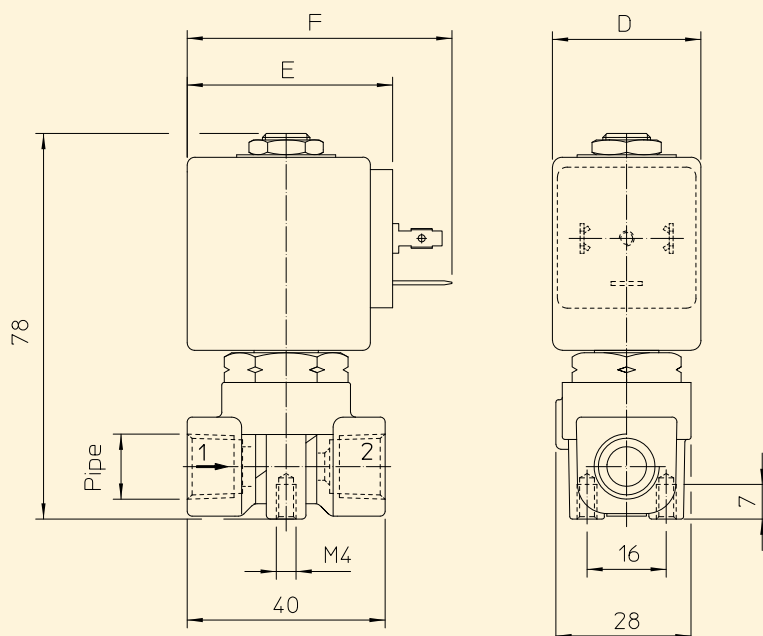

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |





# Solenoid valve 2/2 way N.O. Direct acting - dampness-proof IP 67

21A1ZV25D-X007

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** subplate mounting

**COIL:** 8W - Ø 13  
BDS 155°C (class F)  
BDF - BDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure ( (PS) 40 bar  
Environment temperature:  
with coil class **F** - 10°C + 60°C  
with coil class **H** - 10°C + 80°C



Special item-not standard

| Gaskets                 | Temperature |         | Medium                                                   |
|-------------------------|-------------|---------|----------------------------------------------------------|
| V=FKM (fluoroelastomer) | - 10°C      | + 140°C | Mineral oils (2°E), gasoline<br>gas oil, fuel oils (7°E) |

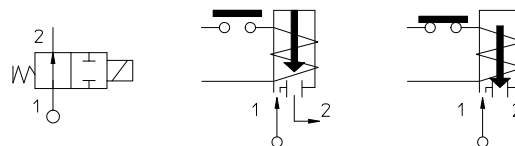

| Pipe              | Code           | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |    |
|-------------------|----------------|---------------|-----|---------|------------|-----------------|------------|---------------------------|----|
|                   |                | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |    |
| SUBPLATE MOUNTING | 21A1ZV25D-X007 | 53            | ~ 7 | 2,5     | 3,2        | 8               | 0          | 14                        | 14 |

## Note

Also available with brass body without lead.  
Available on request and with minimum quantities.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | V=FKM                           |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300 |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                                        |
|------------------------------|------------------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                                |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector dedicated. |

### SPARE PARTS:


- Coil:**  
See coils list
- Complete diaphragm support:**  
Code R450788/V
- Complete armature tube without gasket:**  
Code R450573
- Gasket O-Ring:**  
Code R990000/V
- Gasket O-Ring:**  
Code R990002/VV

### KIT:

KT130ZV30-FG=2+3+4+6+7+8+9

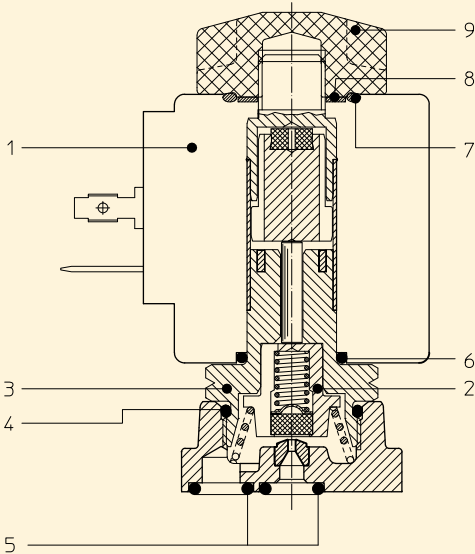

### DIMENSIONS:

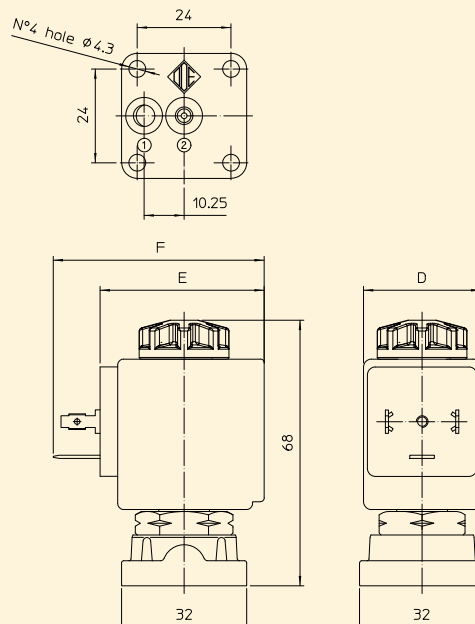

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |



# Solenoid valve 2/2 way N.O. Direct acting

21A1ZR20D-TF

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** subplate mounting

**COIL:** 8W - Ø 13  
BDA - BDS -BSA 155°C (class F)  
BDF - BDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure ( PS) 40 bar  
Environment temperature:  
with coil class **F** - 40°C + 60°C  
with coil class **H** - 40°C + 80°C



Special item-not standard

| Gaskets | Temperature    | Medium                                                 |
|---------|----------------|--------------------------------------------------------|
| R=RUBY  | - 40°C + 180°C | Water, mineral oils (2°E), gas<br>oil, fuel oils (7°E) |

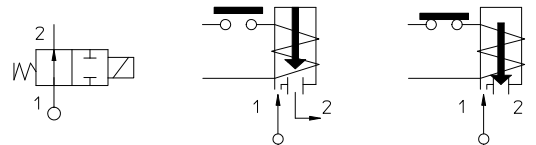

| Pipe              | Code         | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |    |
|-------------------|--------------|---------------|-----|---------|------------|-----------------|------------|---------------------------|----|
|                   |              | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |    |
| SUBPLATE MOUNTING | 21A1ZR20D-TF | 37            | ~ 5 | 2       | 2          | 8               | 0          | 30                        | 30 |

## Note

Available on request and with minimum quantities.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | R=RUBY                          |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300 |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


1. **Coil:**  
See coils list
2. **Complete diaphragm support:**  
Code R450789
3. **Complete armature tube without gasket:**  
Code R450573
4. **Gasket O-Ring:**  
Code R990000/F
5. **Gasket O-Ring:**  
Code R990002/F

### KIT:

KT130ZR30-FF=2+3+4

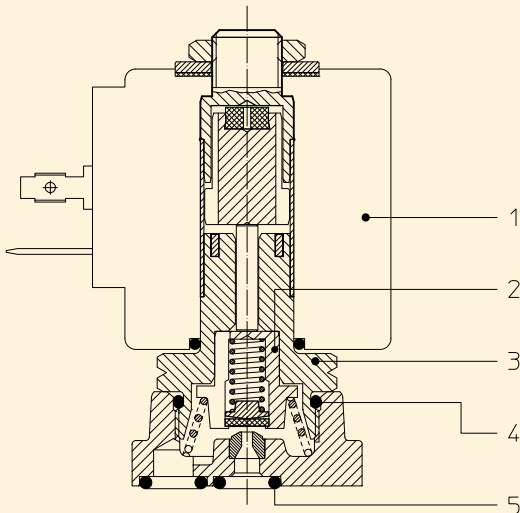

### DIMENSIONS:

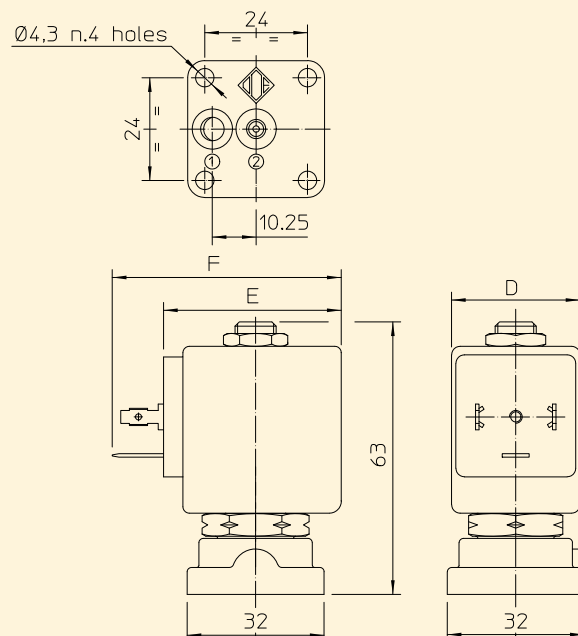

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |



# Solenoid valve 2/2 way N.C. Direct acting

21A3KV15  
÷  
21A2KV55

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.  
Minimum operational pressure is not required.  
The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 1/8 - G 1/4


**COILS:** 8W - Ø 13 (1)  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)  
(1) Explosion-proof housing for coils with electrical connections EN 175301-803 on request.



**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

| Gaskets                     | Temperature |        | Medium                                                |
|-----------------------------|-------------|--------|-------------------------------------------------------|
| V=FKM (fluoroelastomer)     | - 10°C      | +140°C | Mineral oils (2°E), gasoline gas oil, fuel oils (7°E) |
| B=NBR (nitrile rubber)      | - 10°C      | + 90°C | Air, inert gas, water                                 |
| E=EPDM (ethylene-propylene) | - 10°C      | +140°C | Water, steam                                          |

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coils class F - 10°C + 60°C  
with coils class H - 10°C + 80°C



For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A2KE20.

| Pipe ISO 228/1 | Code     | Max viscosity |     | Ø mm | Kv l/mn | Power (watt) | Pressure |                        |    |
|----------------|----------|---------------|-----|------|---------|--------------|----------|------------------------|----|
|                |          | cSt           | °E  |      |         |              | min bar  | M.O.P.D. AC bar DC bar |    |
| G 1/8          | 21A3KV15 | 12            | ~ 2 | 1,5  | 1,4     | 8            | 0        | 30                     | 18 |
|                | 21A3KV20 | 37            | ~ 5 | 2    | 2       | 12           |          | 22                     | 16 |
|                |          |               |     |      |         | 14           |          | 35                     | 30 |
|                |          |               |     |      |         | 8            |          | 14                     | 9  |
|                | 21A3KV25 | 53            | ~ 7 | 2,5  | 3,2     | 12           |          | 30                     | 25 |
|                |          |               |     |      |         | 14           |          | 10                     | 6  |
|                |          |               |     |      |         | 8            |          | 25                     | 18 |
|                | 21A3KV30 | 53            | ~ 7 | 3    | 4       | 12           |          | 20                     | 18 |
|                |          |               |     |      |         | 14           |          | 5                      | 2  |
|                |          |               |     |      |         | 8            |          | 12                     | 7  |
|                | 21A3KV45 | 53            | ~ 7 | 4,5  | 6,5     | 12           |          | 8                      | 7  |
|                |          |               |     |      |         | 14           |          | 12                     | 8  |
| 8              |          |               |     |      |         | 30           | 18       |                        |    |
| G 1/4          | 21A2KV15 | 12            | ~ 2 | 1,5  | 1,4     | 8            | 0        | 30                     | 18 |
|                | 21A2KV20 | 37            | ~ 5 | 2    | 2       | 12           |          | 22                     | 16 |
|                |          |               |     |      |         | 14           |          | 35                     | 30 |
|                |          |               |     |      |         | 8            |          | 14                     | 9  |
|                | 21A2KV25 | 53            | ~ 7 | 2,5  | 3,2     | 12           |          | 30                     | 25 |
|                |          |               |     |      |         | 14           |          | 10                     | 6  |
|                |          |               |     |      |         | 8            |          | 25                     | 18 |
|                | 21A2KV30 | 53            | ~ 7 | 3    | 4       | 12           |          | 20                     | 18 |
|                |          |               |     |      |         | 14           |          | 5                      | 2  |
|                |          |               |     |      |         | 8            |          | 12                     | 7  |
|                | 21A2KV45 | 53            | ~ 7 | 4,5  | 6,5     | 12           |          | 8                      | 7  |
|                |          |               |     |      |         | 14           |          | 12                     | 8  |
| 8              |          |               |     |      |         | 3            | 1        |                        |    |
| 21A2KV55       | 53       | ~ 7           | 5,5 | 9    | 12      | 7            | 2,5      |                        |    |
|                |          |               |     |      | 14      | 10           | 5        |                        |    |
|                |          |               |     |      | 8       | 10           | 5        |                        |    |

**Note** Also available with brass body without lead.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

## MATERIALS:

|                                |                                             |
|--------------------------------|---------------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N                 |
| <b>Armature tube</b>           | Stainless steel AISI series 300             |
| <b>Fixed core</b>              | Stainless steel AISI series 400             |
| <b>Plunger</b>                 | Stainless steel AISI series 400             |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                           |
| <b>Spring</b>                  | Stainless steel AISI series 300             |
| <b>Seal</b>                    | Standard: V=FKM<br>On request: B=NBR E=EPDM |

|                 |                                                                |
|-----------------|----------------------------------------------------------------|
| <b>Orifice:</b> |                                                                |
| ≤ 3 mm          | Insert slot                                                    |
| > 3 mm          | Stainless steel AISI series 300<br>Brass - UNI EN 12165 CW617N |

|                             |               |
|-----------------------------|---------------|
| <b>On request:</b>          |               |
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

## FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

## SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
For orifice ≤ 3 mm  
Code R450886/V  
For orifice > 3 mm  
Code R450898/V
- Complete armature tube:**  
Code R450606

## KIT:

|        |                 |
|--------|-----------------|
| ≤ 3 mm | KT130KV30-A=2+3 |
| > 3 mm | KT130KV55-A=2+3 |

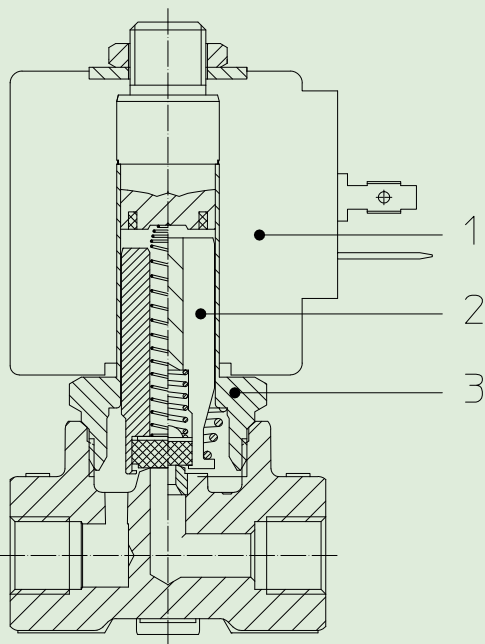

## DIMENSIONS:

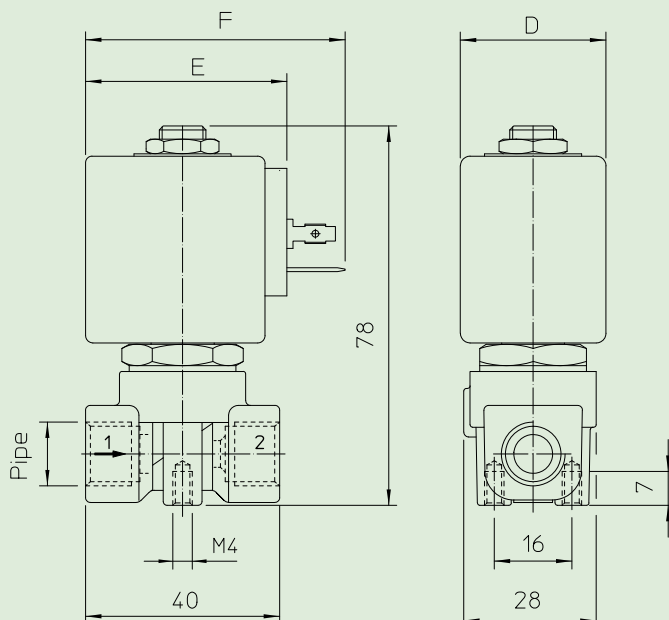

| Type   | Pipe<br>ISO 228/1 |
|--------|-------------------|
| 21A3KV | G 1/8             |
| 21A2KV | G 1/4             |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U            | 12               | 23           | 35             | 36         | 48      | 60      |
| G            | 14               | 27           | 43             | 52         | 55      | 67      |



# Solenoid valve 2/2 way N.C. Direct acting

21A2KV30-W

÷

21A2KV55-W

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 1/4

**COILS:** 8W - Ø13  
 BDA - BDS -BSA 155°C (class F)  
 BDF - BDV 180°C (class H)  
 12W - Ø 13  
 UDA 155°C (class F)  
 14W - Ø 13  
 GDH - GDV 180°C (class H)




Special item-not standard

## MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.

Max. allowable pressure (PS) 40 bar  
 Environment temperature:  
 with coil class F - 10°C + 60°C  
 with coil class H - 10°C + 80°C

| Gaskets                     | Temperature |        | Medium                                                |
|-----------------------------|-------------|--------|-------------------------------------------------------|
|                             | - 10°C      | +140°C |                                                       |
| V=FKM (fluoroelastomer)     | - 10°C      | +140°C | Mineral oils (2°E), gasoline gas oil, fuel oils (7°E) |
| B=NBR (nitrile rubber)      | - 10°C      | + 90°C | Air, inert gas, water                                 |
| E=EPDM (ethylene-propylene) | - 10°C      | +140°C | Water, steam                                          |



For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A2KB30-W.

| Pipe<br>ISO 228/1 | Code       | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |    |     |
|-------------------|------------|---------------|-----|---------|------------|-----------------|------------|----------|--------|----|-----|
|                   |            | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D. |        |    |     |
|                   |            |               |     |         |            |                 |            | AC bar   | DC bar |    |     |
| G 1/4             | 21A2KV30-W | 53            | ~ 7 | 3       | 4          | 8               | 0          | 18       | 13     |    |     |
|                   | 21A2KV45-W |               |     |         |            |                 |            | 10       | 5      |    |     |
|                   |            |               |     |         |            |                 |            | 17       | 8      |    |     |
|                   |            |               |     | 18      | 16         |                 |            |          |        |    |     |
|                   | 21A2KV55-W |               |     | 5,5     | 9          |                 |            | 8        | 12     | 7  | 2   |
|                   |            |               |     |         |            |                 |            | 12       |        | 10 | 3,5 |
|                   |            |               |     |         |            |                 |            | 14       |        | 13 | 7   |

### Note

Available on request and with minimum quantities.

Also available with brass body without lead.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                             |
|--------------------------------|---------------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N                 |
| <b>Armature tube</b>           | Stainless steel AISI series 300             |
| <b>Fixed core</b>              | Stainless steel AISI series 400             |
| <b>Plunger</b>                 | Stainless steel AISI series 400             |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                           |
| <b>Spring</b>                  | Stainless steel AISI series 300             |
| <b>Seal</b>                    | Standard: V=FKM<br>On request: B=NBR E=EPDM |

|                 |                                                    |
|-----------------|----------------------------------------------------|
| <b>Orifice:</b> |                                                    |
| ≤ 3 mm          | <b>Insert slot</b> Stainless steel AISI series 300 |
| > 3 mm          | Brass - UNI EN 12165 CW617N                        |

|                             |               |
|-----------------------------|---------------|
| <b>On request:</b>          |               |
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- 1. Coil:**  
See coils list
- 2. Complete plunger:**  
Code R450898/V-2561
- 3. Complete armature tube:**  
Code R450606

### KIT:

KT130KV55-AM=2+3

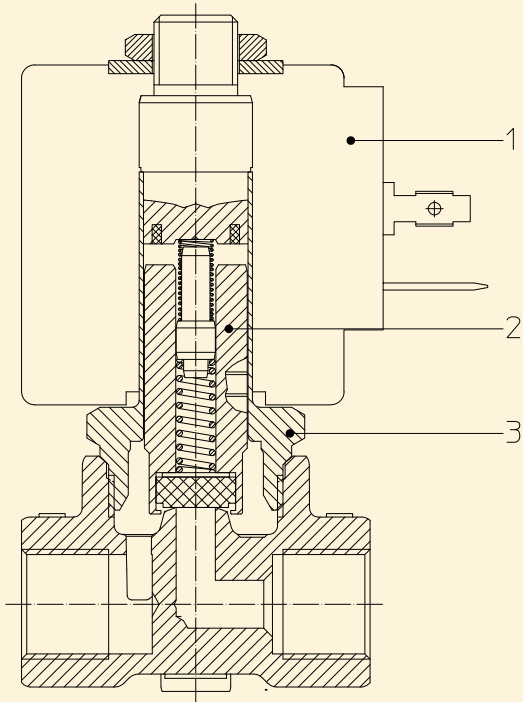

### DIMENSIONS:

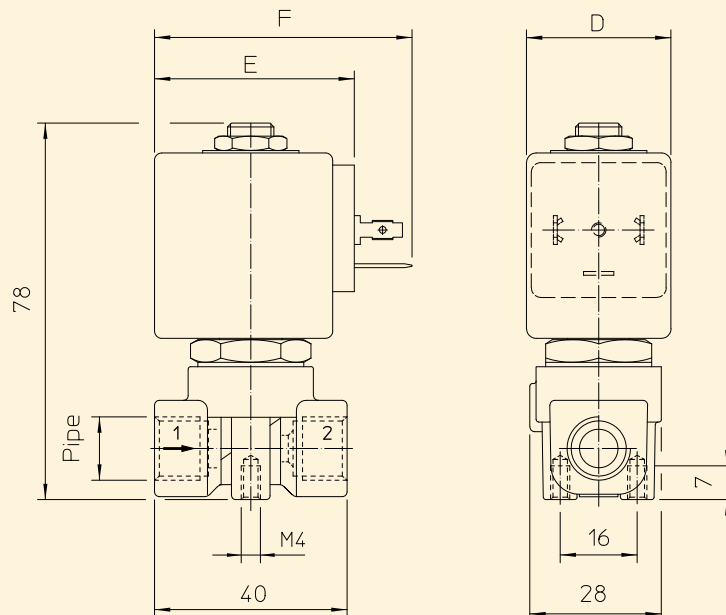

| Typ        | Pipe<br>ISO 228/1 |
|------------|-------------------|
| 21A2KV30-W | G 1/4             |
| 21A2KV45-W |                   |
| 21A2KV55-W |                   |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U            | 12               | 23           | 35             | 36         | 48      | 60      |
| G            | 14               | 27           | 43             | 52         | 55      | 67      |





# Solenoid valve 2/2 way N.C. Direct acting

212A3KV15  
÷  
212A2KV55

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 1/8 - G 1/4

**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**



| Gaskets                 | Temperature |        | Medium                                                |
|-------------------------|-------------|--------|-------------------------------------------------------|
| V=FKM (fluoroelastomer) | - 10°C      | +140°C | Mineral oils (2°E), gasoline gas oil, fuel oils (7°E) |
| B=NBR (nitrile rubber)  | - 10°C      | + 90°C | Air, inert gas, water                                 |

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coil class **F** - 10°C + 60°C  
with coil class **H** - 10°C + 80°C

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 212A2KB15.



| Pipe<br>ISO 228/1 | Code      | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |     |
|-------------------|-----------|---------------|-----|---------|------------|-----------------|------------|---------------------------|-----|
|                   |           | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |     |
| G 1/8             | 212A3KV15 | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 30                        | 18  |
|                   |           |               |     |         |            |                 |            | 22                        | 16  |
|                   | 212A3KV20 | 37            | ~ 5 | 2       | 2          | 12              |            | 35                        | 30  |
|                   |           |               |     |         |            | 14              |            | 14                        | 9   |
|                   | 212A3KV25 | 53            | ~ 7 | 2,5     | 3,2        | 8               |            | 30                        | 25  |
|                   |           |               |     |         |            | 12              |            | 10                        | 6   |
|                   | 212A3KV30 | 53            | ~ 7 | 3       | 4          | 12              |            | 25                        | 18  |
|                   |           |               |     |         |            | 14              |            | 20                        | 2   |
|                   | 212A3KV45 | 53            | ~ 7 | 4,5     | 6,5        | 8               |            | 5                         | 2   |
|                   |           |               |     |         |            | 12              |            | 12                        | 7   |
|                   | 212A3KV45 | 53            | ~ 7 | 4,5     | 6,5        | 14              |            | 12                        | 8   |
|                   |           |               |     |         |            | 8               |            | 8                         | 1   |
| G 1/4             | 212A2KV15 | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 30                        | 18  |
|                   |           |               |     |         |            |                 |            | 22                        | 16  |
|                   | 212A2KV20 | 37            | ~ 5 | 2       | 2          | 12              |            | 35                        | 30  |
|                   |           |               |     |         |            | 14              |            | 14                        | 9   |
|                   | 212A2KV25 | 53            | ~ 7 | 2,5     | 3,2        | 8               |            | 30                        | 25  |
|                   |           |               |     |         |            | 12              |            | 10                        | 6   |
|                   | 212A2KV30 | 53            | ~ 7 | 3       | 4          | 12              |            | 25                        | 18  |
|                   |           |               |     |         |            | 14              |            | 20                        | 2   |
|                   | 212A2KV45 | 53            | ~ 7 | 4,5     | 6,5        | 8               |            | 5                         | 2   |
|                   |           |               |     |         |            | 12              |            | 12                        | 7   |
|                   | 212A2KV45 | 53            | ~ 7 | 4,5     | 6,5        | 14              |            | 12                        | 8   |
|                   |           |               |     |         |            | 8               |            | 3                         | 1   |
|                   | 212A2KV55 | 53            | ~ 7 | 5,5     | 9          | 12              |            | 7                         | 2,5 |
|                   |           |               |     |         |            | 14              |            | 10                        | 5   |

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

**Body** Brass - UNI EN 12165 CW617N  
**Welded armature tube** Stainless steel AISI series 300 +  
 Brass - UNI EN 12165 CW617N  
**Fixed core** Stainless steel AISI series 400  
**Plunger** Stainless steel AISI series 400  
**Phase displacement ring** Copper - Cu 99,9%  
**Spring** Stainless steel AISI series 300  
**Seal** Standard: V=FKM  
 On request: B=NBR

**Orifice:**  
 < 3 mm **Insert slot** Stainless steel AISI series 300  
 > 3 mm Brass - UNI EN 12165 CW617N

**On request:**  
**Connector** Pg 9 or Pg 11  
**Connector conformity** ISO 4400

### FEATURES:


**Electrical conformity** IEC 335  
**Protection degree** IP 65 EN 60529 (DIN 40050)  
 with coil fitted by connector.

### SPARE PARTS:


- 1. Coil:**  
See coils list
- 2. Complete plunger:**  
Code R450898/V
- 3. Complete armature tube:**  
Code R450691
- 4. Gasket O-Ring:**  
Code R990000/V

### KIT:

KS130KV55-F= **2+3+4**

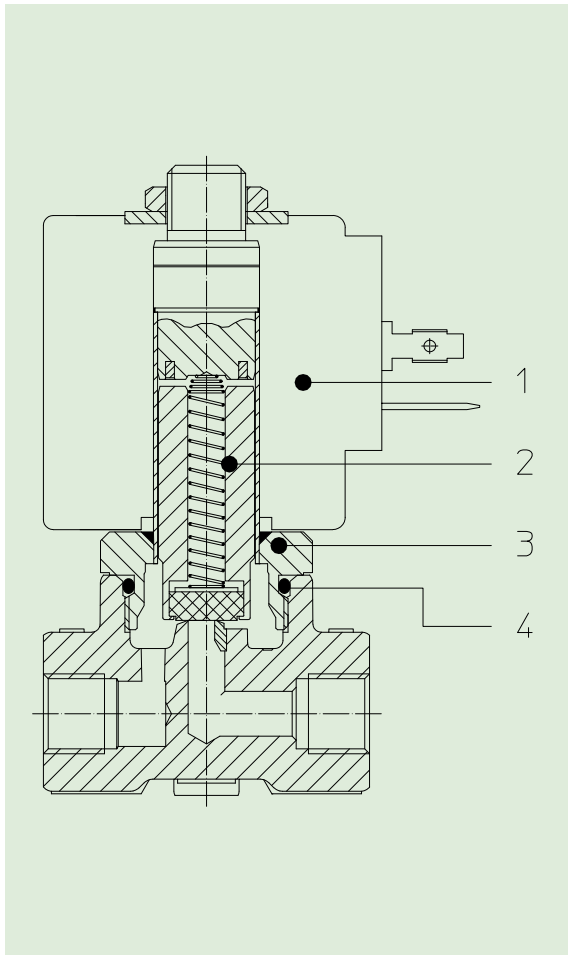

### DIMENSIONS:

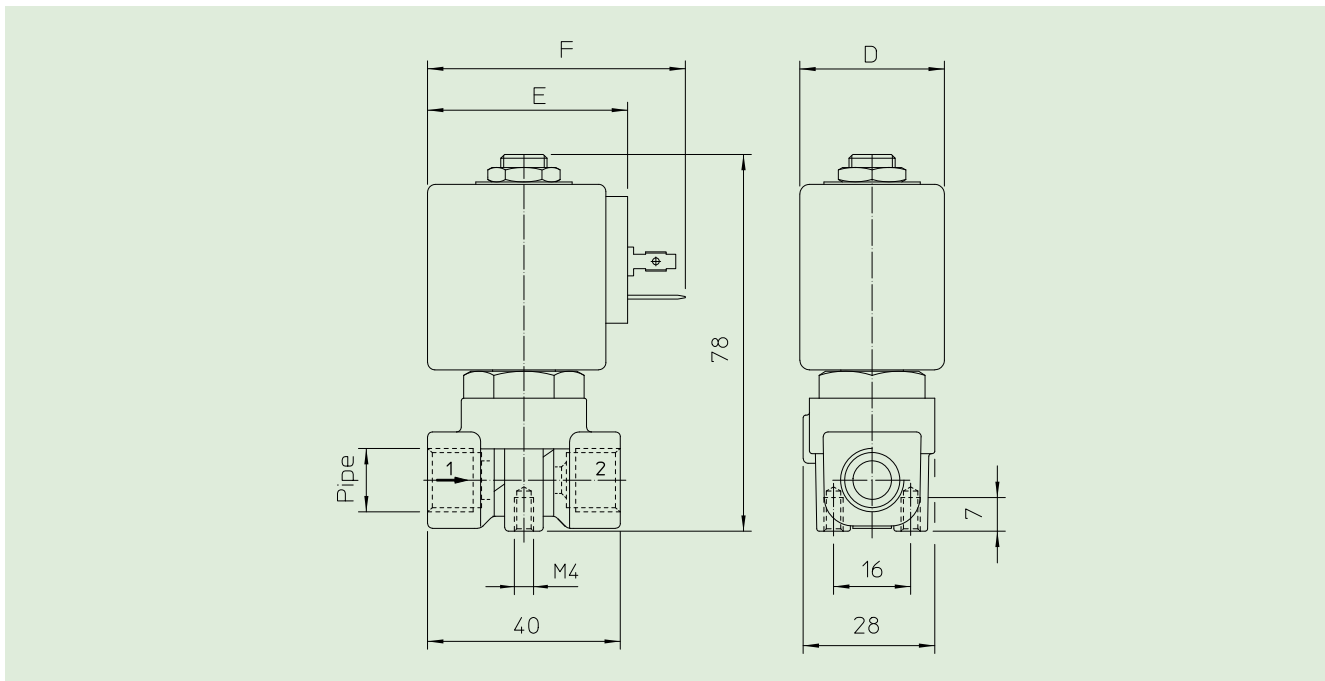

| Type    | Pipe<br>ISO 228/1 |
|---------|-------------------|
| 212A3KV | G 1/8             |
| 212A2KV | G 1/4             |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U            | 12               | 23           | 35             | 36         | 48      | 60      |
| G            | 14               | 27           | 43             | 52         | 55      | 67      |



# Solenoid valve 2/2 way N.C. Direct acting

21A3KR15  
÷  
21A2KR30

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Hot water, Heating  
Steam (180°C)

**PIPES:** G 1/8 - G 1/4


**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coil class F - 40°C + 60°C  
with coil class H - 40°C + 80°C



| Gaskets                           | Temperature |        | Medium                                                        |
|-----------------------------------|-------------|--------|---------------------------------------------------------------|
| R=RUBY                            | - 40°C      | +180°C | Steam, water, mineral oils (2°E),<br>gas oil, fuel oils (7°E) |
| T=PTFE<br>(polytetrafluorethylen) | - 40°C      | +180°C | Steam, water                                                  |



For seals other than RUBY replace the letter "R" with the ones corresponding to the other seals. E.I. 21A3KT15.

| Pipe<br>ISO 228/1 | Code     | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |    |    |
|-------------------|----------|---------------|-----|---------|------------|-----------------|------------|----------|--------|----|----|
|                   |          | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D. |        |    |    |
|                   |          |               |     |         |            |                 |            | AC bar   | DC bar |    |    |
| G 1/8             | 21A3KR15 | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 35       | 15     |    |    |
|                   | 21A3KR20 | 37            | ~ 5 | 2       | 2          |                 |            | 25       | 9      |    |    |
|                   | 21A3KR25 | 53            | ~ 7 | 2,5     | 3,2        |                 |            | 14       | 5      |    |    |
|                   | 21A3KR30 |               |     | 3       | 4          |                 |            | 10       | 4      |    |    |
| G 1/4             | 21A2KR15 | 12            | ~ 2 | 1,5     | 1,4        |                 |            | 8        | 0      | 35 | 15 |
|                   | 21A2KR20 | 37            | ~ 5 | 2       | 2          |                 |            |          |        | 25 | 9  |
|                   | 21A2KR25 | 53            | ~ 7 | 2,5     | 3,2        |                 |            |          |        | 14 | 5  |
|                   | 21A2KR30 |               |     | 3       | 4          |                 |            |          |        | 10 | 4  |

## Note

Also available with brass body without lead.

The use of rigid sealings usually implies a slight leakage, limited within 2scc/min at the pressure of 1 bar.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                        |
|--------------------------------|----------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N            |
| <b>Armature tube</b>           | Stainless steel AISI series 300        |
| <b>Fixed core</b>              | Stainless steel AISI series 400        |
| <b>Plunger</b>                 | Stainless steel AISI series 400        |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                      |
| <b>Spring</b>                  | Stainless steel AISI series 300        |
| <b>Seal</b>                    | Standard: R=RUBY<br>On request: T=PTFE |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300        |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R450820/R
- Complete armature tube:**  
Code R450606

### KIT:

KT130KR30-A=2+3

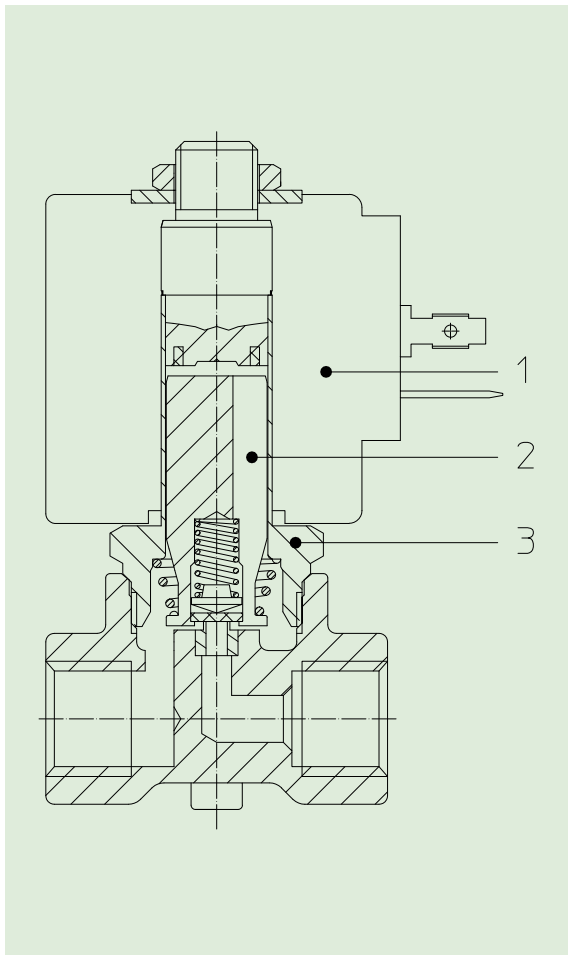

### DIMENSIONS:

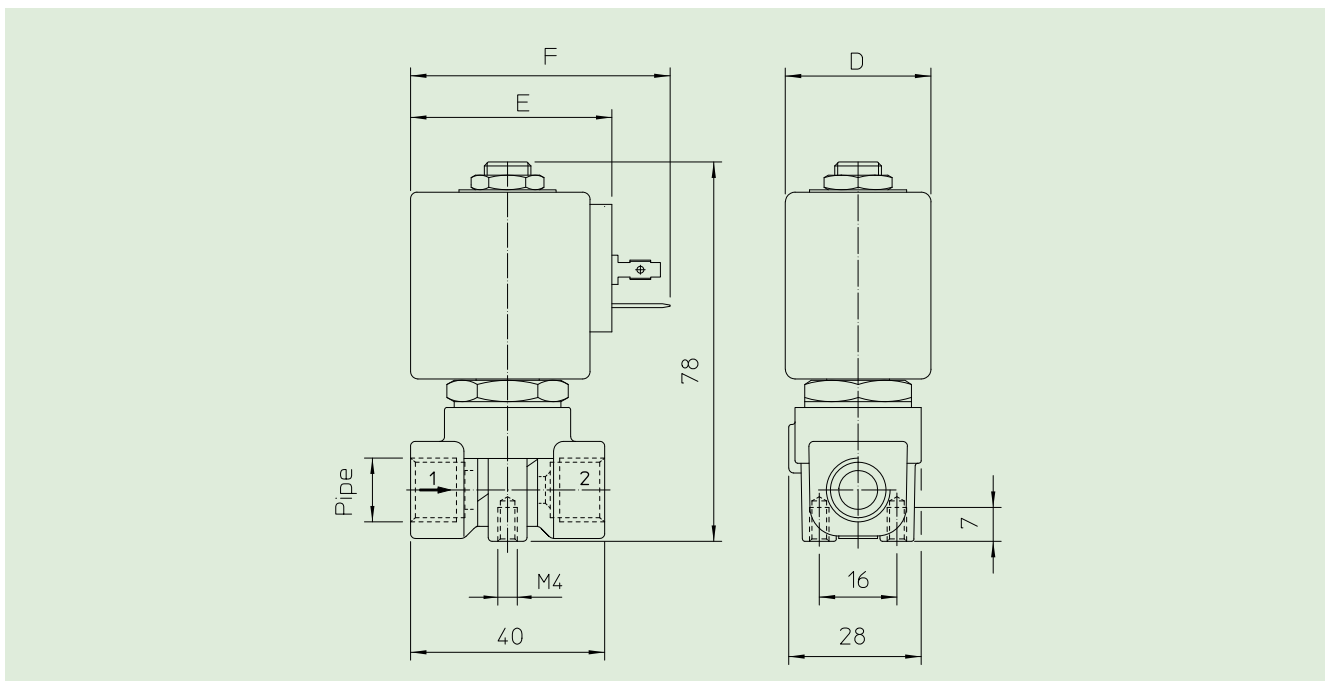

| Type   | Pipe<br>ISO 228/1 |
|--------|-------------------|
| 21A3KR | G 1/8             |
| 21A2KR | G 1/4             |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |



# Solenoid valve 2/2 way N.C. Direct acting

21A2KT55-W

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 1/4

**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coil class **F** - 40°C + 60°C  
with coil class **H** - 40°C + 80°C



Special item-not standard

| Gaskets                           | Temperature    | Medium       |
|-----------------------------------|----------------|--------------|
| T=PTFE<br>(polytetrafluorethylen) | - 40°C + 180°C | Steam, water |



| Pipe<br>ISO 228/1 | Code       | Max viscosity |    | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |   |
|-------------------|------------|---------------|----|---------|------------|-----------------|------------|---------------------------|---|
|                   |            | cSt           | °E |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |   |
| G 1/4             | 21A2KT55-W | -             | -  | 5,5     | 9          | 8               | 0          | 6                         | 2 |

## Note.

Available on request and with minimum quantities.  
With double-frequency coils the MOPD is 15% lower

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | T=PTFE                          |
| <b>Orifice</b>                 | Brass - UNI EN 12165 CW617N     |

### On request:


|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:

- 1. Coil:**  
See coils list
- 2. Complete plunger:**  
Code R451234/T
- 3. Complete armature tube:**  
Code R450606

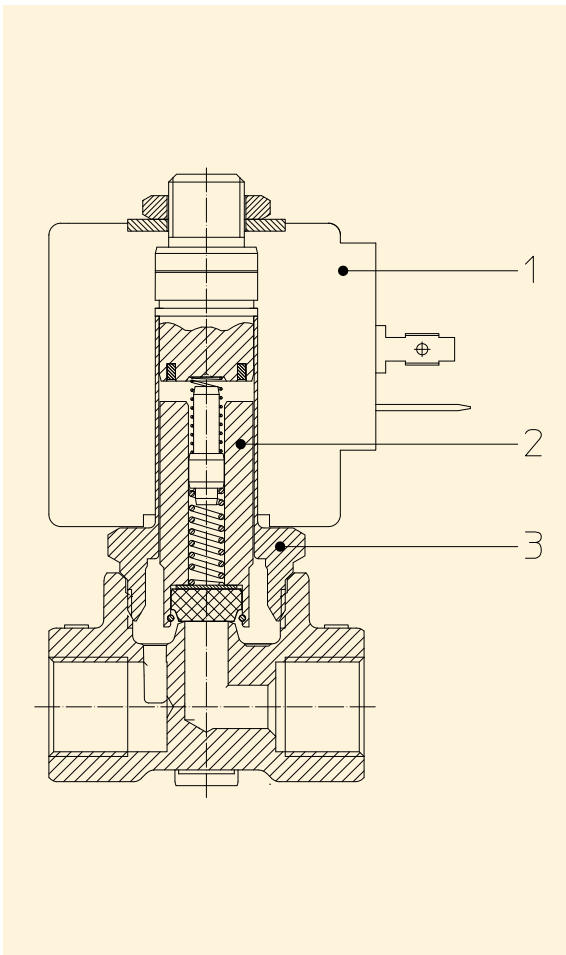

### DIMENSIONS:

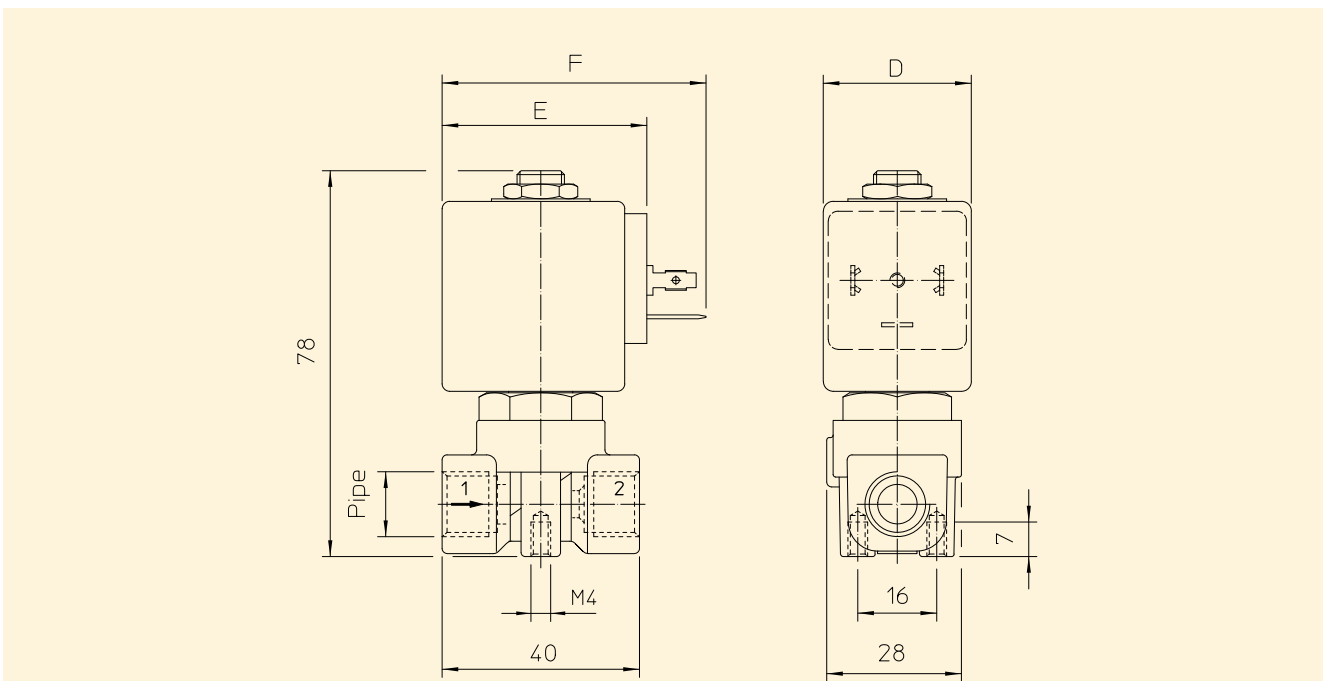

| BOBINE<br>TYPE | PUISSANCE NOMINALE |                  |               | Ecombrements |         |         |
|----------------|--------------------|------------------|---------------|--------------|---------|---------|
|                | W<br>---           | Maintien<br>VA ~ | Appel<br>VA ~ | D<br>mm      | E<br>mm | F<br>mm |
| B              | 8                  | 14,5             | 25            | 30           | 42      | 54      |



# Solenoid valve 2/2 way N.C. Direct acting

21A2K0E45-OR  
÷  
21A2K0E55-OR

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 1/4




**COIL:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.%.**

|                              |               |
|------------------------------|---------------|
| Max. allowable pressure (PS) | 40 bar        |
| Environment temperature:     |               |
| with coil class <b>F</b>     | - 10°C + 60°C |
| with coil class <b>H</b>     | - 10°C + 80°C |



| Gaskets                        | Temperature |        | Medium       |
|--------------------------------|-------------|--------|--------------|
|                                | - 10°C      | +140°C |              |
| E=EPDM<br>(ethylene-propylene) |             |        | Water, steam |



| Pipe<br>ISO 228/1 | Code         | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Potenza<br>(watt) | Pressure   |          |        |
|-------------------|--------------|---------------|-----|---------|------------|-------------------|------------|----------|--------|
|                   |              | cSt           | °E  |         |            |                   | min<br>bar | M.O.P.D. |        |
|                   |              |               |     |         |            |                   |            | AC bar   | DC bar |
| G 1/4             | 21A2K0E45-OR | 53            | ~ 7 | 4,5     | 6,5        | 8                 | 0          | 5        | 2      |
|                   | 21A2K0E55-OR |               |     | 5,5     | 9          |                   |            | 3        | 1      |

### Note

Available on request and with minimum quantities.

Also available with brass body without lead.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | E=EPDM                          |
| <b>Orifice</b>                 | Brass - UNI EN 12165 CW617N     |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- Coil:**  
BDF08024DS
- Complete plunger:**  
Code R450898/E
- Complete armature tube:**  
Code R450603
- Gasket O-Ring:**  
Code R990000/E

### KIT:

KT130KE55-F=2+3+4

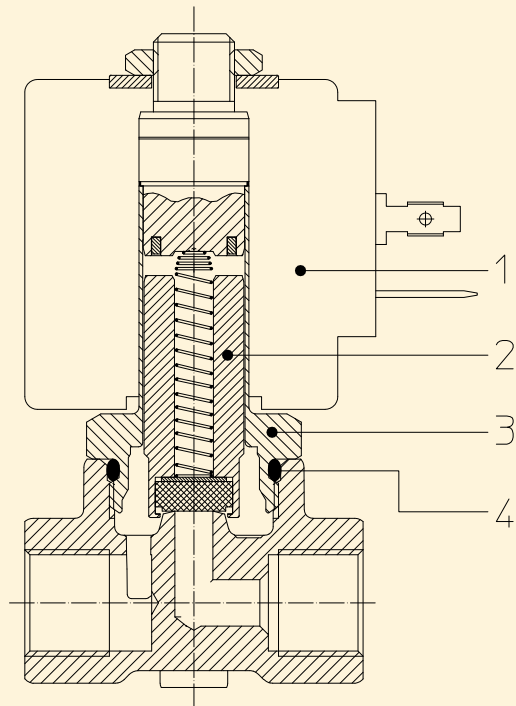

### DIMENSIONS:

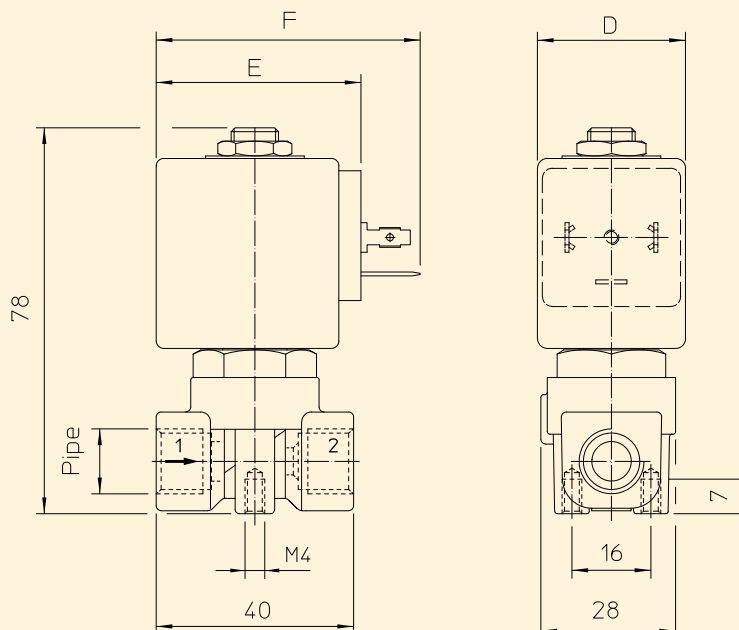

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |





# Solenoid valve 2/2 way N.C. Direct acting

21A2KL45-RPW

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 1/4

**COILS:** 8W - Ø13  
BDA - BDS -BSA 155°C (class F)  
BDF - BDV 180°C (class H)

## MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.

Max. allowable pressure (PS) 40 bar

Environment temperature:


with coil class **F** - 40°C + 60°C

with coil class **H** - 40°C + 80°C



Special item-not standard

| Gaskets                 | Temperature |        | Medium                                                               |
|-------------------------|-------------|--------|----------------------------------------------------------------------|
| L=Rulon (fluoropolimer) | - 40°C      | +180°C | Water, air , inert gas, mineral oils (2°E), steam, gasoline, gas oil |



| Pipe<br>ISO 228/1 | Code         | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |
|-------------------|--------------|---------------|-----|---------|------------|-----------------|------------|----------|--------|
|                   |              | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D. |        |
|                   |              |               |     |         |            |                 |            | AC bar   | DC bar |
| G 1/4             | 21A2KL45-RPW | 53            | ~ 7 | 4,5     | 6,5        | 8               | 0          | 10       | 3,5    |

## Note

Available on request and with minimum quantities.

Also available with brass body without lead.

The "ODE " reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | R=Rulon                         |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300 |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R452718/L
- Complete armature tube:**  
Code R450603
- Gasket O-Ring:**  
Code R990000/V

### KIT:

KT130KL55-GM=2+3+4

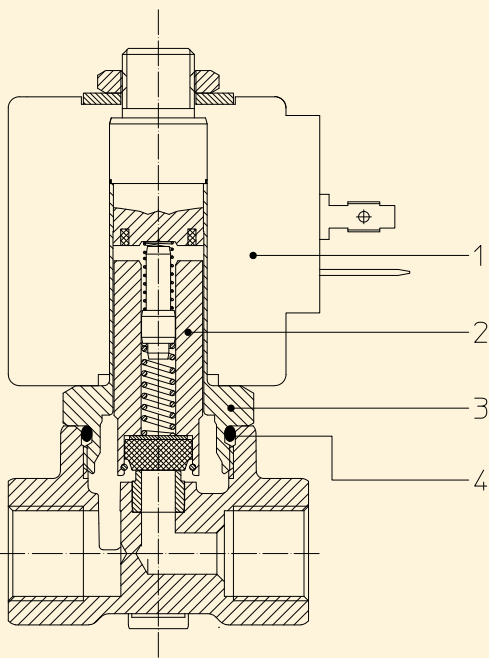

### DIMENSIONS:

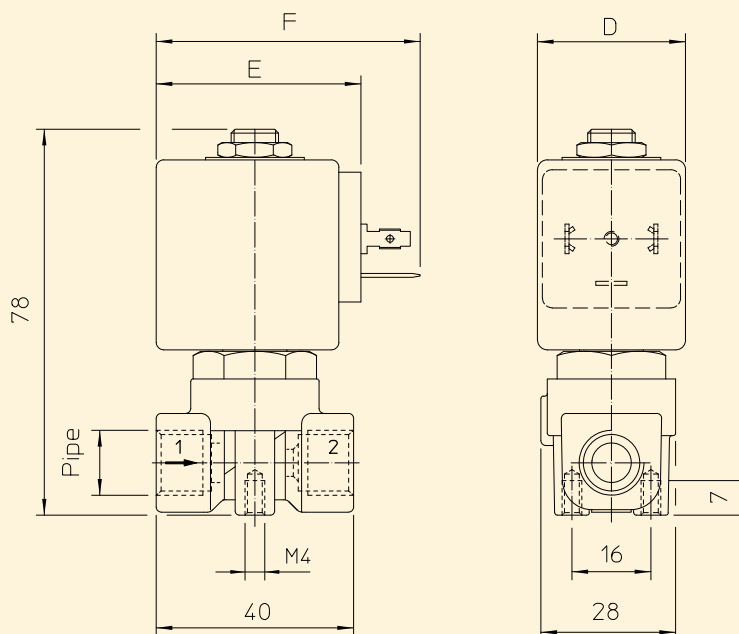

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>---         | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |



# Solenoid valve 2/2 way N.O. Direct acting

21A3ZR15D  
÷  
21A2ZR30G

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carries out ensure maximum reliability and duration.


**USE:** Hot water, Heating  
Steam (180°C)

**PIPES:** G 1/8 - G 1/4

**COILS:**  
8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coils class F - 40°C + 60°C  
with coils class H - 40°C + 80°C

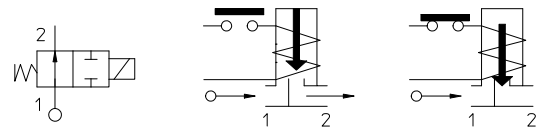

| Gaskets | Temperature |        | Medium                                                        |
|---------|-------------|--------|---------------------------------------------------------------|
|         | - 40°C      | +180°C |                                                               |
| R=RUBY  |             |        | Steam, water, mineral oils (2°E),<br>gas oil, fuel oils (7°E) |

| Pipe<br>ISO 228/1 | Code      | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |    |
|-------------------|-----------|---------------|-----|---------|------------|-----------------|------------|----------|--------|----|
|                   |           | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D. |        |    |
|                   |           |               |     |         |            |                 |            | AC bar   | DC bar |    |
| G 1/8             | 21A3ZR15D | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 35       | 35     |    |
|                   | 21A3ZR20D | 37            | ~ 5 | 2       | 2          |                 |            | 30       | 30     |    |
|                   | 21A3ZR25D | 53            | ~ 7 | 2,5     | 3,2        |                 |            | 12       | 16     | 16 |
|                   | 21A3ZR25G |               |     |         |            |                 |            | 14       | 17     | 17 |
|                   | 21A3ZR30D |               |     | 3       | 4          |                 |            | 8        | 10     | 10 |
|                   | 21A3ZR30G |               |     |         |            |                 |            | 12       | 15     | 15 |
| G 1/4             | 21A2ZR15D | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 35       | 35     |    |
|                   | 21A2ZR20D | 37            | ~ 5 | 2       | 2          |                 |            | 30       | 30     |    |
|                   | 21A2ZR25D | 53            | ~ 7 | 2,5     | 3,2        |                 |            | 12       | 16     | 16 |
|                   | 21A2ZR25G |               |     |         |            |                 |            | 14       | 17     | 17 |
|                   | 21A2ZR30D |               |     | 3       | 4          |                 |            | 8        | 10     | 10 |
|                   | 21A2ZR30G |               |     |         |            |                 |            | 12       | 15     | 15 |
|                   |           |               |     |         |            |                 |            |          |        |    |

## Note

Also available with brass body without lead.

The use of rigid sealings usually implies a slight leakage, limited within 2scc/min at the pressure of 1 bar.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | R=RUBY                          |
| <b>Orifice: Insert slot</b>    | Stainless steel AISI series 300 |

### On request:


|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:

|                                                  |                 |                   |
|--------------------------------------------------|-----------------|-------------------|
| <b>1. Coil:</b>                                  | See coils list  | <b>KIT:</b>       |
|                                                  |                 | 8W                |
| <b>2. Complete diaphragm support:</b>            | 8W Code R450789 | KT130ZR30-F=2+3+4 |
|                                                  | 12W - 14W       | 12W - 14W         |
|                                                  | Code R450789/14 | KT130ZR30-G=2+3+4 |
| <b>3. Complete armature tube without gasket:</b> | Code R450573    |                   |
| <b>4. Gasket O-Ring:</b>                         | Code R990000/V  |                   |

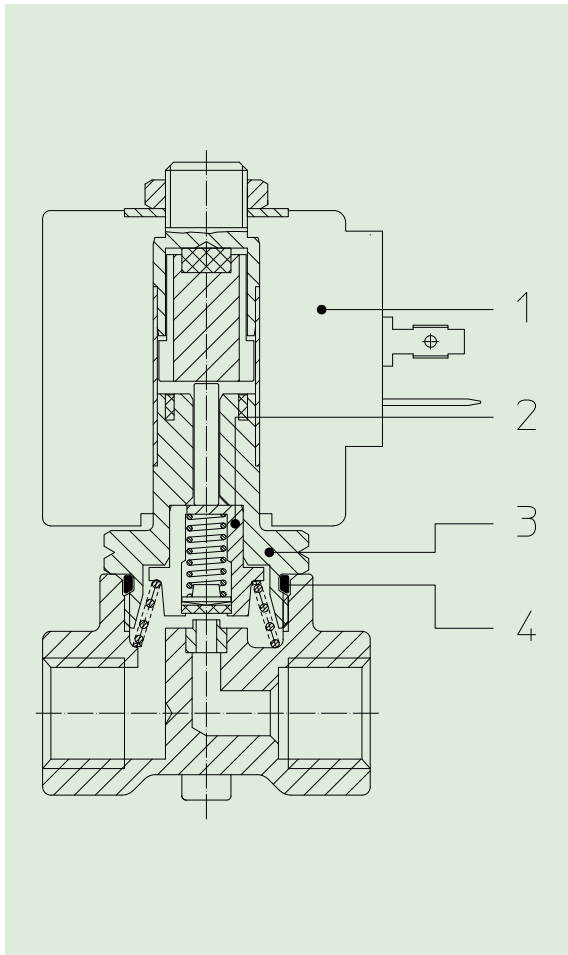

### DIMENSIONS:

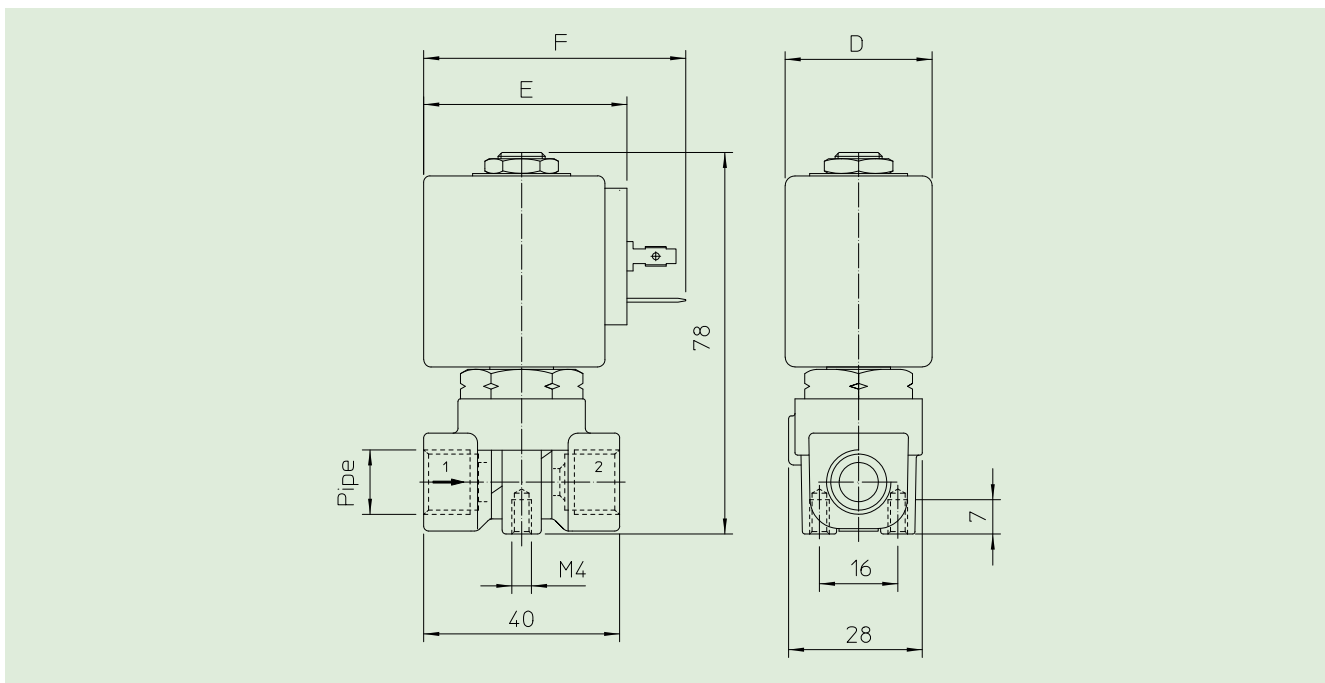

| Type   | Pipe<br>ISO 228/1 |
|--------|-------------------|
| 21A3ZR | G 1/8             |
| 21A2ZR | G 1/4             |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U            | 12               | 23           | 35             | 36         | 48      | 60      |
| G            | 14               | 27           | 43             | 52         | 55      | 67      |



# Solenoid valve 2/2 way N.O. Direct acting

21A3ZV15D  
÷  
21A2ZV55G

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 1/8 - G 1/4

**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**



| Gaskets                 | Temperature |        | Medium                                                |
|-------------------------|-------------|--------|-------------------------------------------------------|
| V=FKM (fluoroelastomer) | - 10°C      | +140°C | Mineral oils (2°E), gasoline gas oil, fuel oils (7°E) |
| B=NBR (nitrile rubber)  | - 10°C      | + 90°C | Air, inert gas, water                                 |

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coils class F - 10°C + 60°C  
with coils class H - 10°C + 80°C

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A3ZB20D.



| Pipe<br>ISO 228/1 | Code      | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |     |
|-------------------|-----------|---------------|-----|---------|------------|-----------------|------------|---------------------------|-----|
|                   |           | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |     |
| G 1/8             | 21A3ZV15D | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 25                        | 25  |
|                   | 21A3ZV20D |               |     |         |            |                 |            | 20                        | 20  |
|                   | 21A3ZV20G | 37            | ~ 5 | 2       | 2          | 12              |            | 30                        | 30  |
|                   | 21A3ZV25D |               |     |         |            | 14              |            | 14                        |     |
|                   | 21A3ZV25G | 53            | ~ 7 | 2,5     | 3,2        | 8               |            | 14                        | 14  |
|                   | 21A3ZV30D |               |     |         |            | 12              |            | 10                        | 10  |
|                   | 21A3ZV30G |               |     | 14      | 15         | 15              |            |                           |     |
|                   | 21A3ZV45D |               |     | 8       | 4          | 4               |            |                           |     |
|                   | 21A3ZV45G |               |     | 12      | 6          | -               |            |                           |     |
|                   | 14        |               |     | 6       | 6          |                 |            |                           |     |
| G 1/4             | 21A2ZV15D | 12            | ~ 2 | 1,5     | 1,4        | 8               | 0          | 25                        | 25  |
|                   | 21A2ZV20D |               |     |         |            |                 |            | 20                        | 20  |
|                   | 21A2ZV20G | 37            | ~ 5 | 2       | 2          | 12              |            | 30                        | 30  |
|                   | 21A2ZV25D |               |     |         |            | 14              |            | 14                        |     |
|                   | 21A2ZV25G | 53            | ~ 7 | 2,5     | 3,2        | 8               |            | 14                        | 14  |
|                   | 21A2ZV30D |               |     |         |            | 12              |            | 17                        | 17  |
|                   | 21A2ZV30G |               |     | 14      | 10         | 10              |            |                           |     |
|                   | 21A2ZV45D |               |     | 8       | 4          | 4               |            |                           |     |
|                   | 21A2ZV45G |               |     | 12      | 6          | -               |            |                           |     |
|                   | 14        |               |     | 6       | 6          |                 |            |                           |     |
|                   | 21A2ZV55D | 53            | ~ 7 | 4,5     | 6,5        | 8               |            | 2,5                       | 2,5 |
|                   | 21A2ZV55G |               |     |         |            | 12              |            | 3,5                       | -   |
|                   | 14        | 9             | 12  | 3,5     | 3,5        |                 |            |                           |     |

**Note** Also available with brass body without lead.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                      |
|--------------------------------|--------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N          |
| <b>Armature tube</b>           | Stainless steel AISI series 300      |
| <b>Fixed core</b>              | Stainless steel AISI series 400      |
| <b>Plunger</b>                 | Stainless steel AISI series 400      |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                    |
| <b>Spring</b>                  | Stainless steel AISI series 300      |
| <b>Seal</b>                    | Standard: V=FKM<br>On request: B=NBR |

|                 |                                                    |
|-----------------|----------------------------------------------------|
| <b>Orifice:</b> |                                                    |
| ≤ 3 mm          | <b>Insert slot</b> Stainless steel AISI series 300 |
| > 3 mm          | Brass - UNI EN 12165 CW617N                        |


|                             |               |
|-----------------------------|---------------|
| <b>On request:</b>          |               |
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:

- |                                                                                                                                                                                               |                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1. Coil:</b><br>See coils list                                                                                                                                                             | <b>4. Gasket O-Ring:</b><br>Code R990000/V                                                                                                                                |
| <b>2. Complete diaphragm support:</b><br>For orifice ≤ 3 mm<br>8W Code R450788/V<br>12W - 14W<br>Code R450788/V14<br>For orifice > 3 mm<br>8W Code R450786/V<br>12W - 14W<br>Code R450786/V14 | <b>KIT:</b><br>Orifice ≤ 3 mm<br>8W<br>KT130ZV30-F=2+3+4<br>12W - 14W<br>KT130ZV30-G=2+3+4<br>Orifice > 3 mm<br>8W<br>KT130ZV55-F=2+3+4<br>12W - 14W<br>KT130ZV55-G=2+3+4 |
| <b>3. Complete armature tube without gasket:</b><br>Code R450573                                                                                                                              |                                                                                                                                                                           |

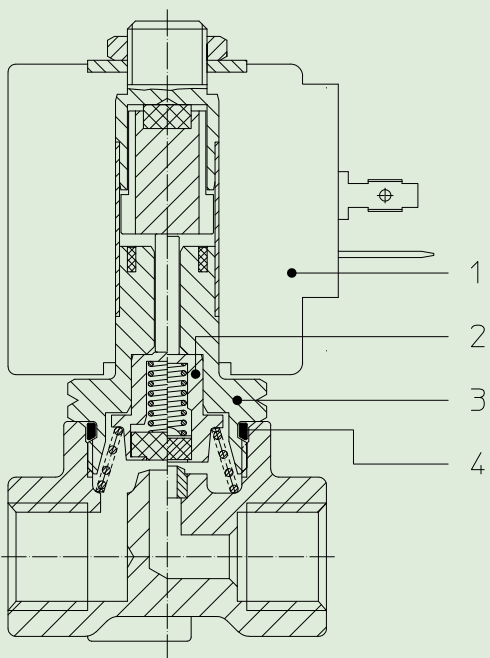

### DIMENSIONS:

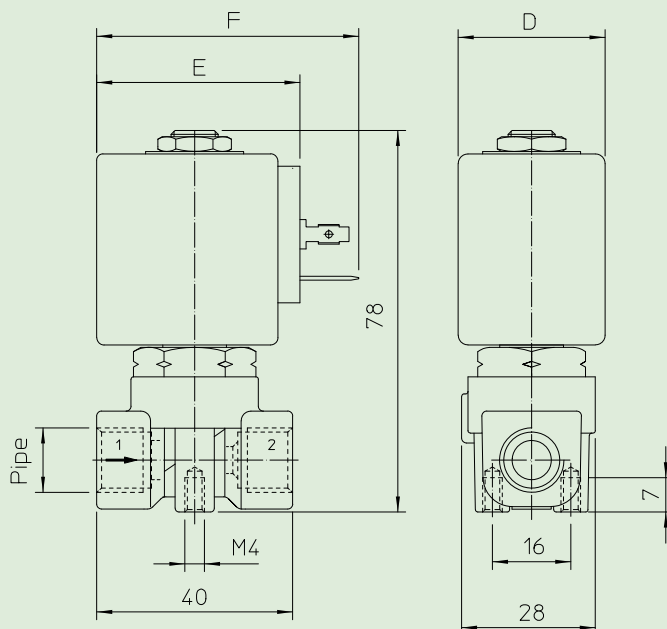

| Type   | Pipe<br>ISO 228/1 |
|--------|-------------------|
| 21A3ZV | G 1/8             |
| 21A2ZV | G 1/4             |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U            | 12               | 23           | 35             | 36         | 48      | 60      |
| G            | 14               | 27           | 43             | 52         | 55      | 67      |



# Solenoid valve 2/2 way N.C. Direct acting

21A5KT55-W

### PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 3/8

**COILS:** 8W - Ø 13  
 BDA - BDS - BSA 155°C (class F)  
 BDF - BDV 180°C (class H)  
 12W - Ø 13  
 UDA 155°C (class F)  
 14W - Ø 13  
 GDH - GDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
 Environment temperature:  
 with coils class F - 40°C + 60°C  
 with coils class H - 40°C + 80°C



Special item-not standard

| Gaskets                           | Temperature |         | Medium       |
|-----------------------------------|-------------|---------|--------------|
| T=PTFE<br>(polytetrafluorethylen) | - 40°C      | + 180°C | Steam, water |



| Pipe<br>ISO 228/1 | Code       | Max viscosity |    | Ø<br>mm | Kv<br>l/min | Power<br>(watt) | Pressure   |                           |   |
|-------------------|------------|---------------|----|---------|-------------|-----------------|------------|---------------------------|---|
|                   |            | cSt           | °E |         |             |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |   |
| G 3/8             | 21A5KT55-W | -             | -  | 5,5     | 9           | 8               | 0          | 6                         | 2 |

### Note.

Available on request and with minimum quantities.  
 With double-frequency coils the MOPD is 15% lower

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | T=PTFE                          |
| <b>Orifice</b>                 | Brass - UNI EN 12165 CW617N     |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R451234/T
- Complete armature tube:**  
Code R450606

### KIT:

KT130K755-AM =2+3

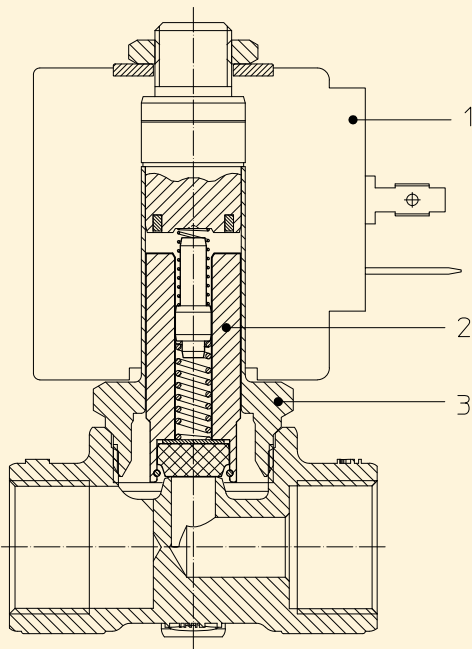

### DIMENSIONS:

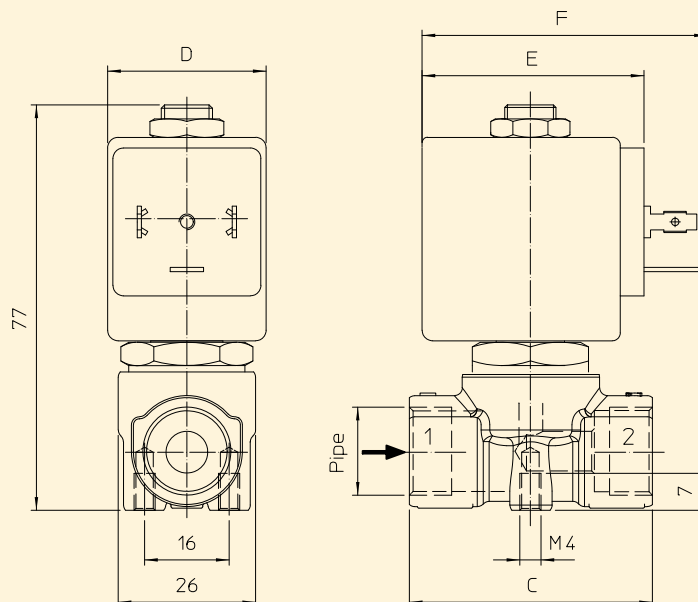

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|---------|
|           | W<br>=           | Hold<br>VA ~ | Inrush<br>VA ~ | C<br>mm    | D<br>mm | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 46         | 30      | 42      | 54      |





# Solenoid valve 2/2 way N.C. Direct acting

21A5KT45

÷

21A8KT55

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 3/8 - G 1/2

**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar




Ambient temperature:

with coils class F - 40°C + 60°C

with coils class H - 40°C + 80°C



| Guarnizioni                       | Temperature |         | Medium       |
|-----------------------------------|-------------|---------|--------------|
| T=PTFE<br>(polytetrafluorethylen) | - 40°C      | + 180°C | Water, steam |



| Pipe<br>ISO 228/1 | Code     | Max viscosity |    | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |
|-------------------|----------|---------------|----|---------|------------|-----------------|------------|----------|--------|
|                   |          | cSt           | °E |         |            |                 | min<br>bar | M.O.P.D. |        |
|                   |          |               |    |         |            |                 |            | AC bar   | DC bar |
| G 3/8             | 21A5KT45 | -             | -  | 4,5     | 6,5        | 8               | 0          | 5        | 1,5    |
|                   |          |               |    |         |            |                 |            | 10       | 3,5    |
|                   |          |               |    |         |            |                 |            | 12       | 6      |
|                   | 21A5KT55 |               |    | 8       | 3,5        |                 |            | 1        |        |
|                   |          |               |    | 12      | 6          |                 |            | 2        |        |
|                   |          |               |    | 14      | 7          |                 |            | 5        |        |
| G 1/2             | 21A8KT45 | -             | -  | 4,5     | 6,5        | 8               | 0          | 5        | 1,5    |
|                   |          |               |    |         |            |                 |            | 10       | 3,5    |
|                   |          |               |    |         |            |                 |            | 12       | 6      |
|                   | 21A8KT55 |               |    | 8       | 3,5        |                 |            | 1        |        |
|                   |          |               |    | 12      | 6          |                 |            | 2        |        |
|                   |          |               |    | 14      | 7          |                 |            | 5        |        |

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                 |
|--------------------------------|---------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N     |
| <b>Armature tube</b>           | Stainless steel AISI series 300 |
| <b>Fixed core</b>              | Stainless steel AISI series 400 |
| <b>Plunger</b>                 | Stainless steel AISI series 400 |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%               |
| <b>Spring</b>                  | Stainless steel AISI series 300 |
| <b>Seal</b>                    | T=PTFE                          |
| <b>Orifice</b>                 | Brass - UNI EN 12165 CW617N     |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R451234/T
- Complete armature tube:**  
Code R450606

### KIT:

KT130KT55-A=2+3

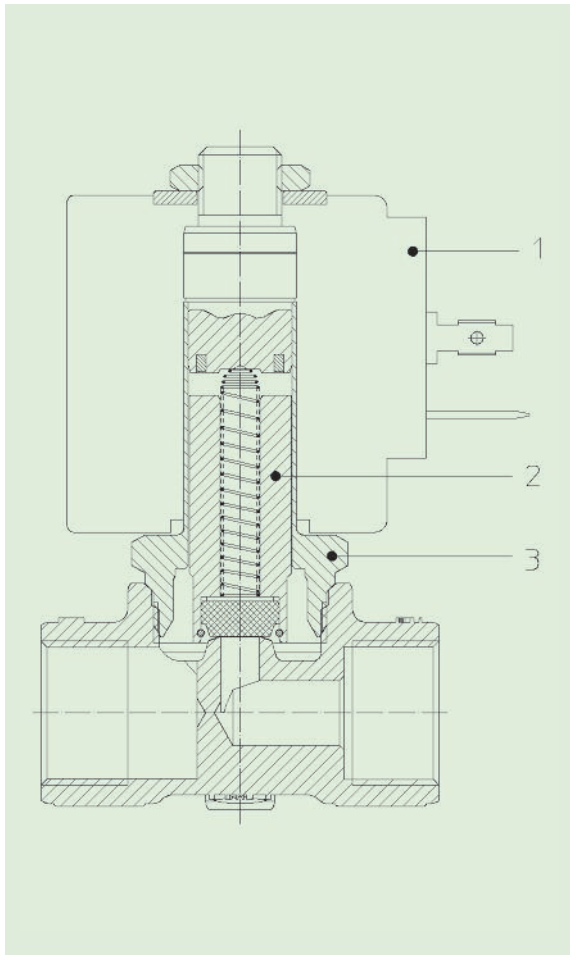

### DIMENSIONS:

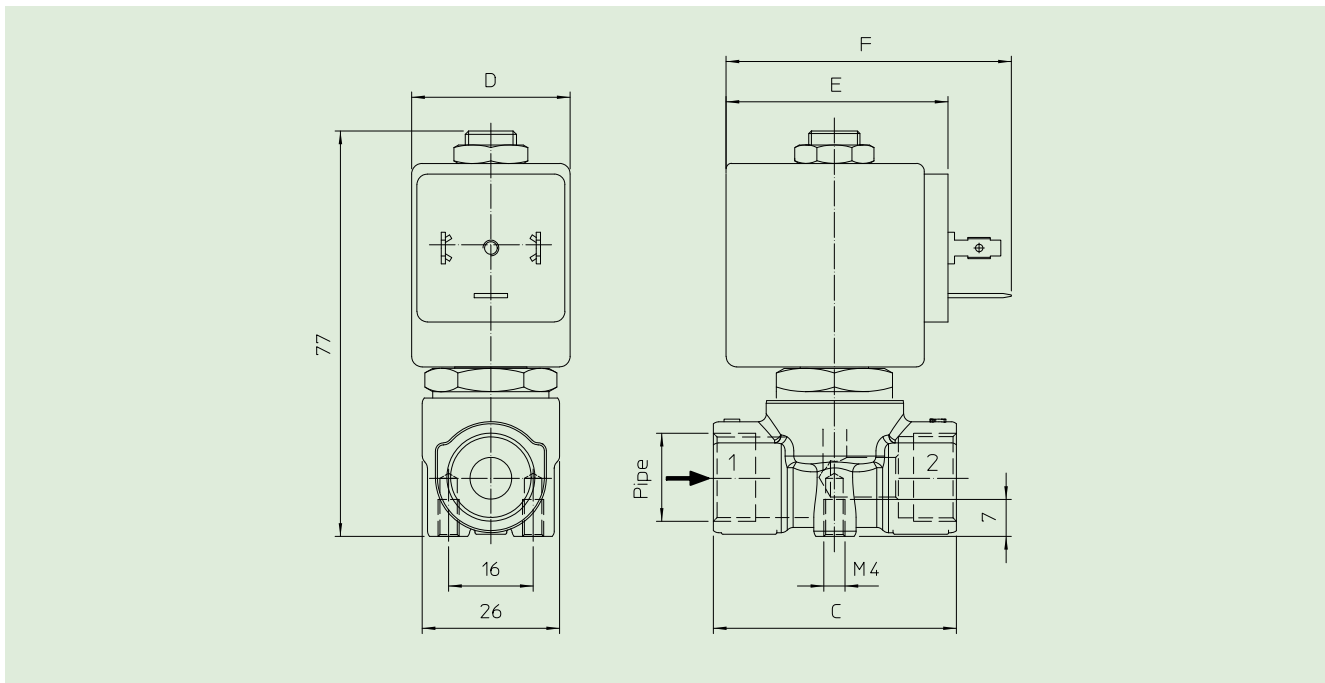

| Type   | Pipe<br>ISO 228/1 | C<br>mm |
|--------|-------------------|---------|
| 21A5KT | G 3/8             | 46      |
| 21A8KT | G 1/2             | 58      |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U            | 12               | 23           | 35             | 36         | 48      | 60      |
| G            | 14               | 27           | 43             | 52         | 55      | 67      |



# Solenoid valve 2/2 way N.C. Direct acting

21A5KV45  
÷  
21A8KV55

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 3/8 - G 1/2

**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)  
(1) Explosion-proof housing for coils with electrical connections EN 175301-803 on request.



## MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.


Max. allowable pressure (PS) 40 bar

Ambient temperature:

with coils class F - 10°C + 60°C

with coils class H - 10°C + 80°C

| Gaskets                 | Temperature |        | Medium                                                   |
|-------------------------|-------------|--------|----------------------------------------------------------|
|                         | - 10°C      | +140°C |                                                          |
| V=FKM (fluoroelastomer) | - 10°C      | +140°C | Mineral oils (2°E), gasoline<br>gas oil, fuel oils (7°E) |
| B=NBR (nitrile rubber)  | - 10°C      | + 90°C | Air, inert gas, water                                    |



For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A5KB55.

| Pipe<br>ISO 228/1 | Code     | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |     |
|-------------------|----------|---------------|-----|---------|------------|-----------------|------------|----------|--------|-----|
|                   |          | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D. |        |     |
|                   |          |               |     |         |            |                 |            | AC bar   | DC bar |     |
| G 3/8             | 21A5KV45 | 53            | ~ 7 | 4,5     | 6,5        | 8               | 0          | 5        | 2      |     |
|                   |          |               |     |         |            |                 |            | 12       | 7      |     |
|                   |          |               |     |         |            |                 |            | 14       | 8      |     |
|                   | 21A5KV55 |               |     |         |            |                 |            | 8        | 3      | 1   |
|                   |          |               |     |         |            |                 |            | 12       | 7      | 2,5 |
|                   |          |               |     |         |            |                 |            | 14       | 10     | 5   |
| G 1/2             | 21A8KV45 | 53            | ~ 7 | 4,5     | 6,5        | 8               | 0          | 5        | 2      |     |
|                   |          |               |     |         |            |                 |            | 12       | 7      |     |
|                   |          |               |     |         |            |                 |            | 14       | 12     | 8   |
|                   | 21A8KV55 |               |     |         |            |                 |            | 8        | 3      | 1   |
|                   |          |               |     |         |            |                 |            | 12       | 7      | 2,5 |
|                   |          |               |     |         |            |                 |            | 14       | 10     | 5   |

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                      |
|--------------------------------|--------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N          |
| <b>Armature tube</b>           | Stainless steel AISI series 300      |
| <b>Fixed core</b>              | Stainless steel AISI series 400      |
| <b>Plunger</b>                 | Stainless steel AISI series 400      |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                    |
| <b>Spring</b>                  | Stainless steel AISI series 300      |
| <b>Seal</b>                    | Standard: V=FKM<br>On request: B=NBR |
| <b>Orifice</b>                 | Brass - UNI EN 12165 CW617N          |

**On request:**  
**Connector** Pg 9 or Pg 11  
**Connector conformity** ISO 4400

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R450898/V
- Complete armature tube:**  
Code R450606

### KIT:

KT130KV55-A=2+3

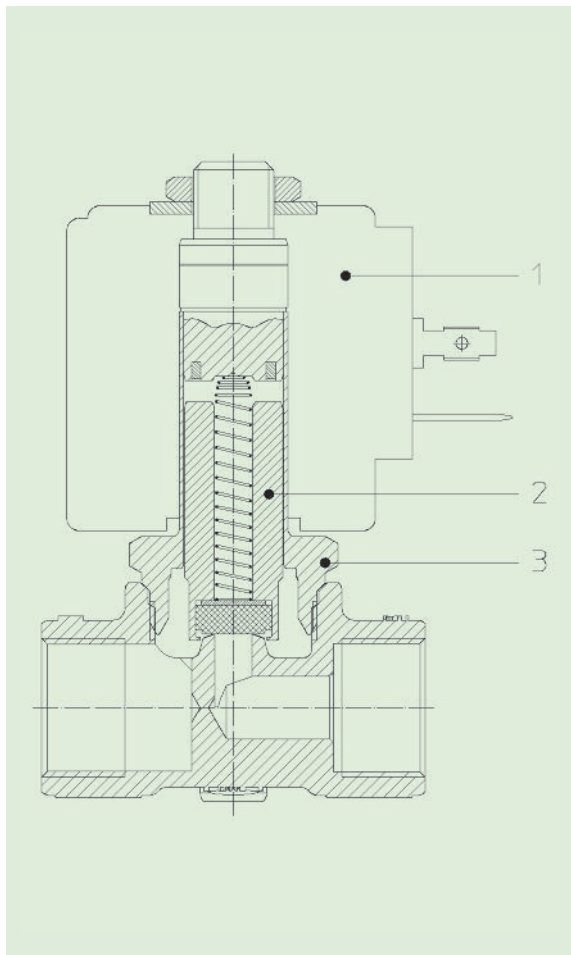

### DIMENSIONS:

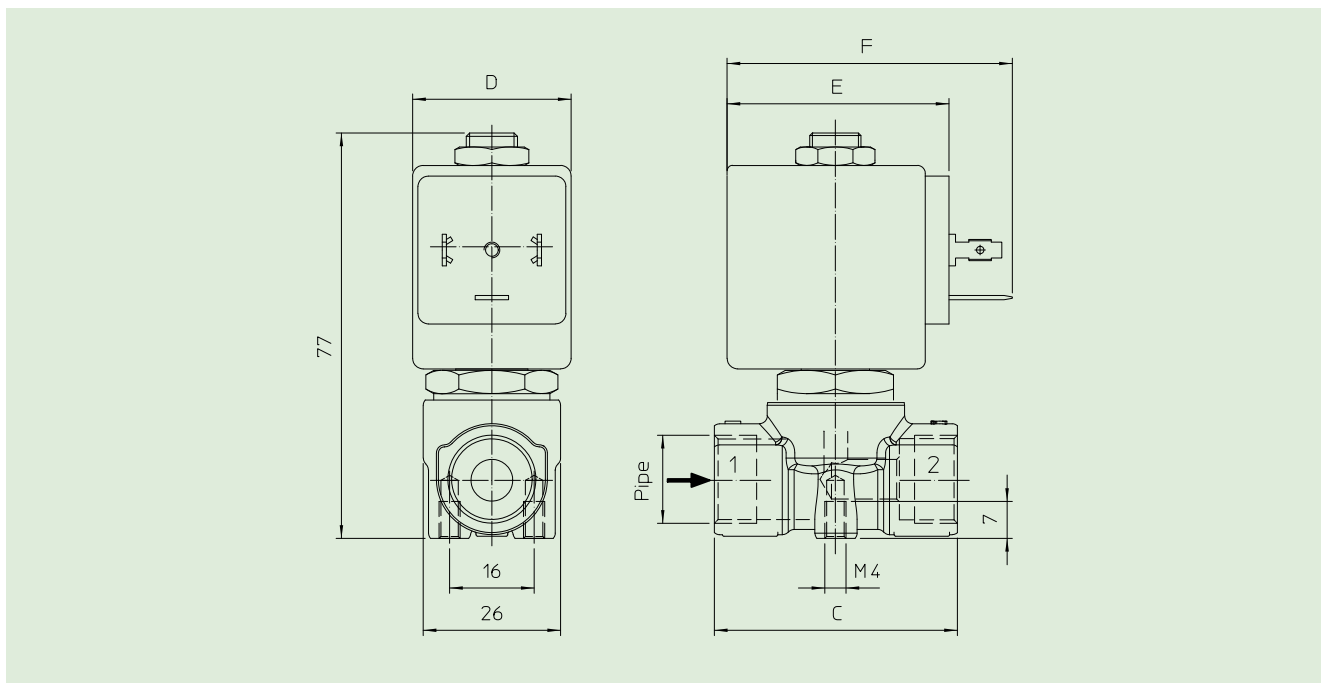

| Type   | Pipe ISO 228/1 | C mm |
|--------|----------------|------|
| 21A5KV | G 3/8          | 46   |
| 21A8KV | G 1/2          | 58   |

| COIL TYPE | POWER ABSORPTION |           |             | DIMENSIONS |      |      |
|-----------|------------------|-----------|-------------|------------|------|------|
|           | W ==             | Hold VA ~ | Inrush VA ~ | D mm       | E mm | F mm |
| B         | 8                | 14,5      | 25          | 30         | 42   | 54   |
| U         | 12               | 23        | 35          | 36         | 48   | 60   |
| G         | 14               | 27        | 43          | 52         | 55   | 67   |



# Solenoid valve 2/2 way N.C. Direct acting

212A5KV45

÷

212A8KV55

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 3/8 - G 1/2


**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar  
Ambient temperature:  
with coils class F - 10°C + 60°C  
with coils class H - 10°C + 80°C



| Gaskets                 | Temperature    | Medium                                                   |
|-------------------------|----------------|----------------------------------------------------------|
| V=FKM (fluoroelastomer) | - 10°C + 140°C | Mineral oils (2°E), gasoline<br>gas oil, fuel oils (7°E) |



| Pipe<br>ISO 228/1 | Code      | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |                           |   |
|-------------------|-----------|---------------|-----|---------|------------|-----------------|------------|---------------------------|---|
|                   |           | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D.<br>AC bar DC bar |   |
| G 3/8             | 212A5KV45 | 53            | ~ 7 | 4,5     | 6,5        | 8               | 0          | 5                         | 2 |
|                   |           |               |     |         |            | 12              |            | 12                        | 7 |
|                   |           |               |     |         |            | 14              |            | 8                         | 8 |
|                   | 212A5KV55 |               |     | 8       | 3          | 1               |            |                           |   |
|                   |           |               |     | 12      | 7          | 2,5             |            |                           |   |
|                   |           |               |     | 14      | 10         | 5               |            |                           |   |
| G 1/2             | 212A8KV45 | 53            | ~ 7 | 4,5     | 6,5        | 8               | 5          | 2                         |   |
|                   |           |               |     |         |            | 12              | 12         | 7                         |   |
|                   |           |               |     |         |            | 14              | 8          | 8                         |   |
|                   | 212A8KV55 |               |     | 8       | 3          | 1               |            |                           |   |
|                   |           |               |     | 12      | 7          | 2,5             |            |                           |   |
|                   |           |               |     | 14      | 10         | 5               |            |                           |   |

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

|                                |                                                                  |
|--------------------------------|------------------------------------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N                                      |
| <b>Welded armature tube</b>    | Stainless steel AISI series 300 +<br>Brass - UNI EN 12165 CW617N |
| <b>Fixed core</b>              | Stainless steel AISI series 400                                  |
| <b>Plunger</b>                 | Stainless steel AISI series 400                                  |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                                                |
| <b>Spring</b>                  | Stainless steel AISI series 300                                  |
| <b>Seal</b>                    | V=FKM                                                            |
| <b>Orifice</b>                 | Brass - UNI EN 12165 CW617N                                      |

### On request:

|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

### FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

### SPARE PARTS:


- Coil:**  
See coils list
- Complete plunger:**  
Code R450898/V
- Complete armature tube:**  
Code R450691
- Gasket O-Ring:**  
Code R990000/V

### KIT:

KS130KV55-F= **2+3+4**

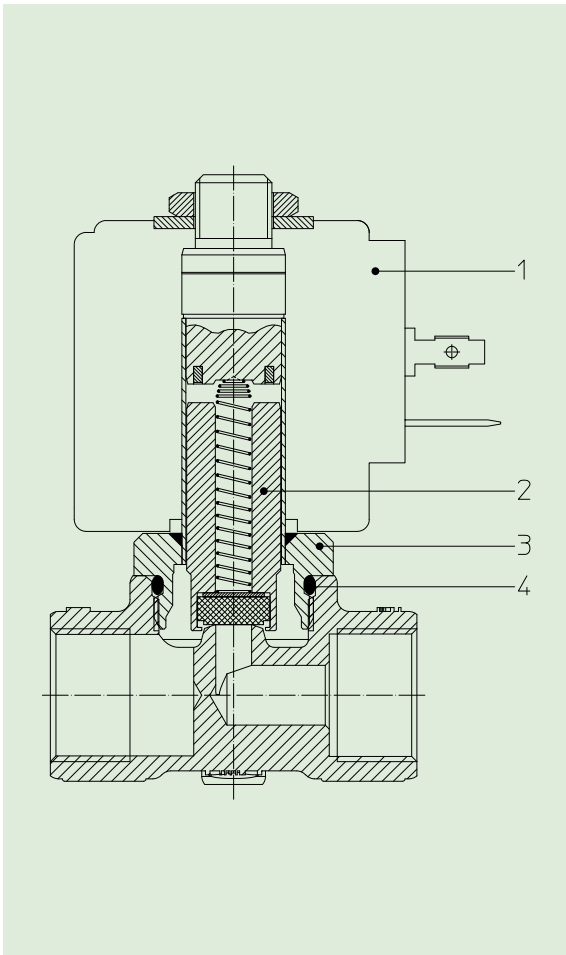

### DIMENSIONS:

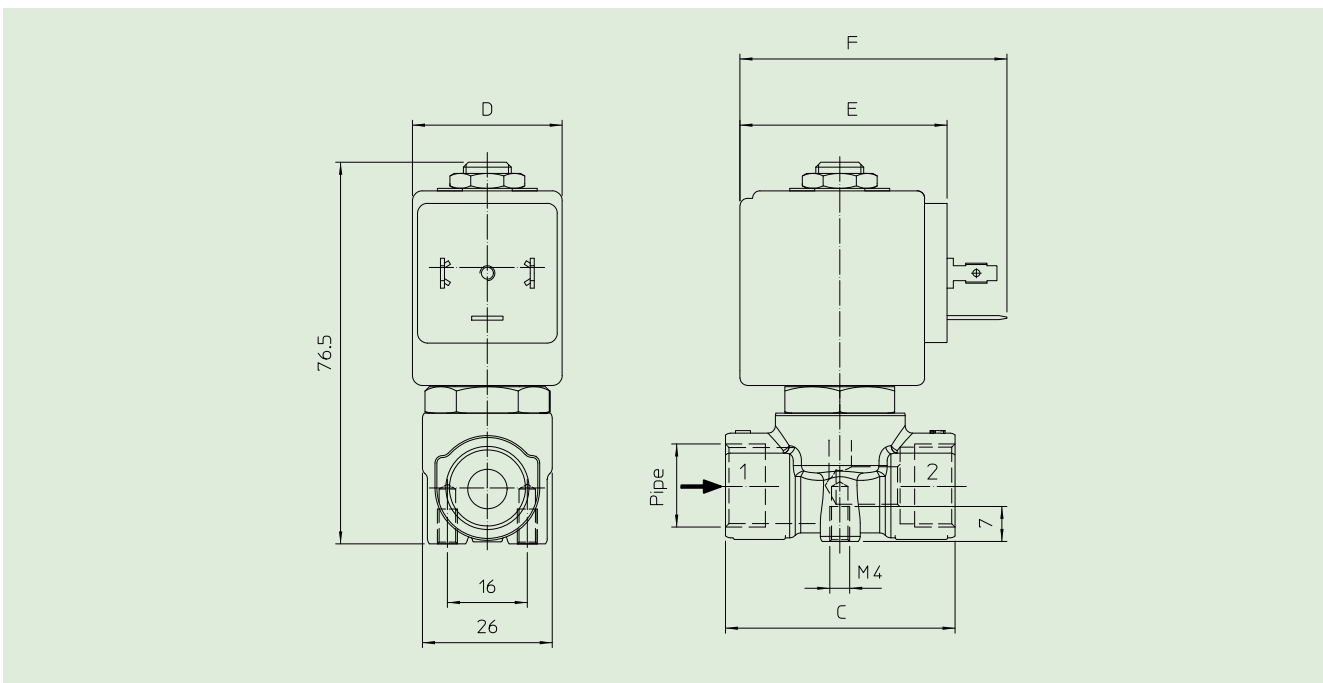

| Type    | Pipe<br>ISO 228/1 | C<br>mm |
|---------|-------------------|---------|
| 212A5KV | G 3/8             | 46      |
| 212A8KV | G 1/2             | 58      |

| COIL<br>TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|--------------|------------------|--------------|----------------|------------|---------|---------|
|              | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B            | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U            | 12               | 23           | 35             | 36         | 48      | 60      |
| G            | 14               | 27           | 43             | 52         | 55      | 67      |



# Solenoid valve 2/2 way N.O. Direct acting

21A5ZV45D

÷

21A8ZV55G

## PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPES:** G 3/8 - G 1/2

**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDF - BDV 180°C (class H)  
12W - Ø 13  
UDA 155°C (class F)  
14W - Ø 13  
GDH - GDV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 40 bar

Ambient temperature:


with coils class F - 10°C + 60°C

with coils class H - 10°C + 80°C



| Gaskets                 | Temperature |        | Medium                                                   |
|-------------------------|-------------|--------|----------------------------------------------------------|
|                         | - 10°C      | +140°C |                                                          |
| V=FKM (fluoroelastomer) | - 10°C      | +140°C | Mineral oils (2°E), gasoline<br>gas oil, fuel oils (7°E) |
| B=NBR (nitrile rubber)  | - 10°C      | + 90°C | Air, inert gas, water                                    |

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A5ZB45D.



| Pipe<br>ISO 228/1 | Code      | Max viscosity |     | Ø<br>mm | Kv<br>l/mn | Power<br>(watt) | Pressure   |          |        |   |   |     |     |   |   |     |   |
|-------------------|-----------|---------------|-----|---------|------------|-----------------|------------|----------|--------|---|---|-----|-----|---|---|-----|---|
|                   |           | cSt           | °E  |         |            |                 | min<br>bar | M.O.P.D. |        |   |   |     |     |   |   |     |   |
|                   |           |               |     |         |            |                 |            | AC bar   | DC bar |   |   |     |     |   |   |     |   |
| G 3/8             | 21A5ZV45D | 53            | ~ 7 | 4,5     | 6,5        | 0               | 0          | 4        | 4      |   |   |     |     |   |   |     |   |
|                   | 21A5ZV45G |               |     |         |            |                 |            | 6        | -      |   |   |     |     |   |   |     |   |
|                   | 21A5ZV55D |               |     |         |            |                 |            | 6        | 6      |   |   |     |     |   |   |     |   |
|                   | 21A5ZV55G |               |     |         |            |                 |            | 2,5      | 2,5    |   |   |     |     |   |   |     |   |
| G 1/2             | 21A5ZV55G |               |     | 53      | ~ 7        |                 |            | 5,5      | 9      | 0 | 0 | 3,5 | -   |   |   |     |   |
|                   | 21A5ZV55G |               |     |         |            |                 |            |          |        |   |   | 3,5 | 3,5 |   |   |     |   |
|                   | 21A8ZV45D |               |     |         |            |                 |            | 4,5      | 6,5    |   |   | 4,5 | 6,5 | 0 | 0 | 4   | 4 |
|                   | 21A8ZV45G |               |     |         |            |                 |            |          |        |   |   |     |     |   |   | 6   | - |
|                   | 21A8ZV55D | 6             | 6   |         |            |                 |            |          |        |   |   |     |     |   |   |     |   |
|                   | 21A8ZV55G | 2,5           | 2,5 |         |            |                 |            |          |        |   |   |     |     |   |   |     |   |
|                   | G 1/2     | 21A8ZV55G     | 53  |         |            | ~ 7             | 5,5        | 9        | 0      |   |   | 0   | 2,5 |   |   | 2,5 |   |
|                   |           | 21A8ZV55G     |     |         |            |                 |            |          |        |   |   |     | 3,5 |   |   | -   |   |
| 21A8ZV55G         |           | 3,5           |     | 3,5     |            |                 |            |          |        |   |   |     |     |   |   |     |   |
| 21A8ZV55G         |           | 3,5           |     | 3,5     |            |                 |            |          |        |   |   |     |     |   |   |     |   |

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

## MATERIALS::

|                                |                                      |
|--------------------------------|--------------------------------------|
| <b>Body</b>                    | Brass - UNI EN 12165 CW617N          |
| <b>Armature tube</b>           | Stainless steel AISI series 400      |
| <b>Fixed core</b>              | Stainless steel AISI series 400      |
| <b>Plunger</b>                 | Stainless steel AISI series 400      |
| <b>Phase displacement ring</b> | Copper - Cu 99,9%                    |
| <b>Spring</b>                  | Stainless steel AISI series 300      |
| <b>Seal</b>                    | Standard: V=FKM<br>On request: B=NBR |
| <b>Orifice</b>                 | Brass - UNI EN 12165 CW617N          |

## On request:


|                             |               |
|-----------------------------|---------------|
| <b>Connector</b>            | Pg 9 or Pg 11 |
| <b>Connector conformity</b> | ISO 4400      |

## FEATURES:


|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| <b>Electrical conformity</b> | IEC 335                                                      |
| <b>Protection degree</b>     | IP 65 EN 60529 (DIN 40050)<br>with coil fitted by connector. |

## SPARE PARTS:

|                                                                                             |                                                    |
|---------------------------------------------------------------------------------------------|----------------------------------------------------|
| <b>1. Coil:</b><br>See coils list                                                           | <b>KIT:</b><br>8W                                  |
| <b>2. Complete diaphragm support:</b><br>8W Code R450786/V<br>12W - 14W<br>Code R450786/V14 | KT130ZV55-F=2+3+4<br>12W -14W<br>KT130ZV55-G=2+3+4 |
| <b>3. Complete armature tube without gasket:</b><br>Code R450573                            |                                                    |
| <b>4. Gasket O-Ring:</b><br>Code R990000/V                                                  |                                                    |

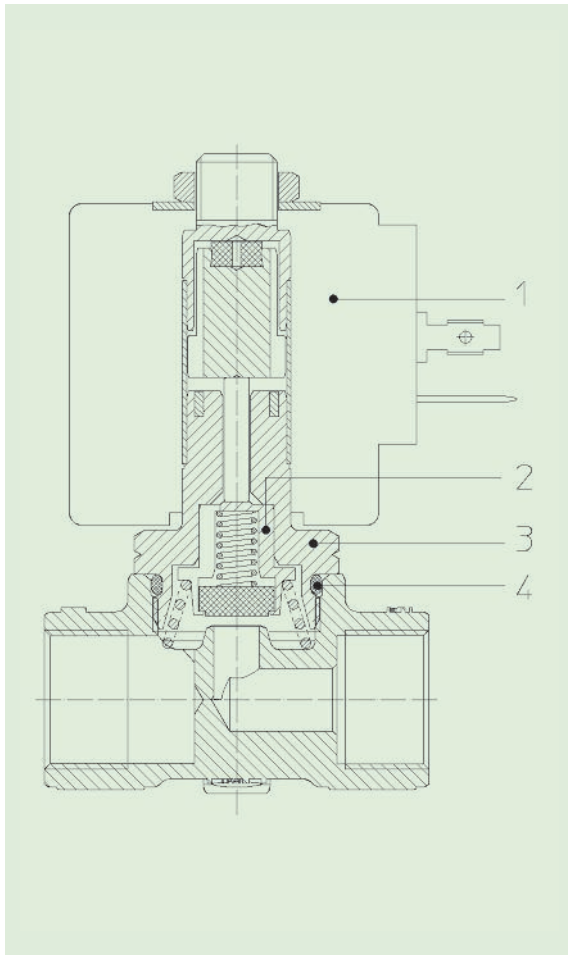

## DIMENSIONS:

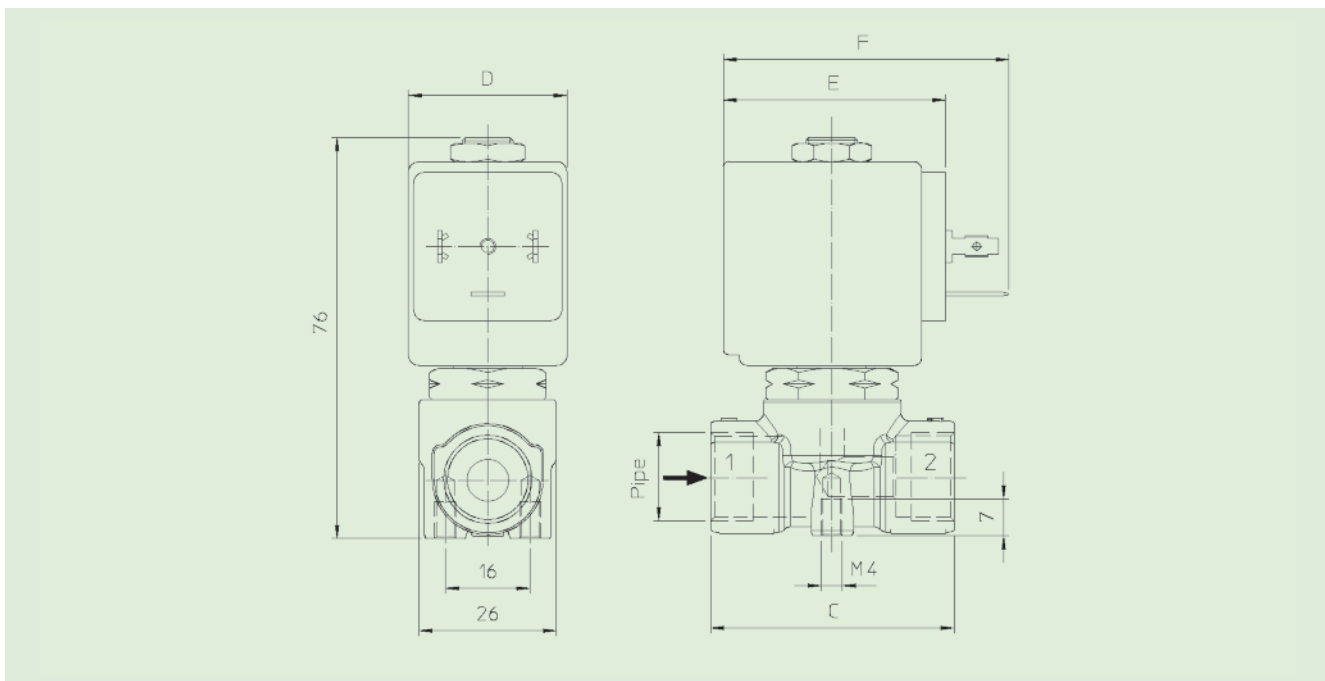

| Type   | Pipe ISO 228/1 | C mm |
|--------|----------------|------|
| 21A5ZV | G 3/8          | 46   |
| 21A8ZV | G 1/2          | 58   |

| COIL TYPE | POWER ABSORPTION |              |                | DIMENSIONS |         |         |
|-----------|------------------|--------------|----------------|------------|---------|---------|
|           | W<br>==          | Hold<br>VA ~ | Inrush<br>VA ~ | D<br>mm    | E<br>mm | F<br>mm |
| B         | 8                | 14,5         | 25             | 30         | 42      | 54      |
| U         | 12               | 23           | 35             | 36         | 48      | 60      |
| G         | 14               | 27           | 43             | 52         | 55      | 67      |